

Characteristics:

Safety lock buckle, easy installation,cable output.

Product picture printing is for reference only,
subject to the actual product

Technical index :

- Mounting type: Free hanging (In-Line)
- Material of core: Ferrite
- Applicable standards: GB20840-2014
- Operating temperature: -25℃ ~ +60℃
- Storage temperature: -30℃ ~ +90℃
- Frequency range: 50Hz-1KHz
- Waterproof grade: IP00
- Dielectric strength: Input (bare conductor)/Output AC 800V/1min 50Hz
Output/housing AC 3.5KV/1min 50Hz




Electrical parameters:The following parameters are typical values. The
actual values shall be subject to the actual measurement of the product

Rated input	1	5			10			20		A
Rated output	1	2.5	5	10	5	10	20	20	25	mA
Turns ratio	1:1000	1:2000	1:1000	1:500	1:2000	1:1000	1:500	1:1000	1:800	—
Sampling resistance	5	10	5	5	10	5	5	5	5	Ω
Accuracy	1	0.5	1	1	0.5	1	1	1	1	%
Weight	25									g



Specifications of cable:
0.35mm² high temperature wire
The length of cable: 30cm~32cm

TVS: Transient Voltage Suppressor (7.5V)
Current output type
Secondary is not allowed to open circuit

Dimension (in mm±0.5) :

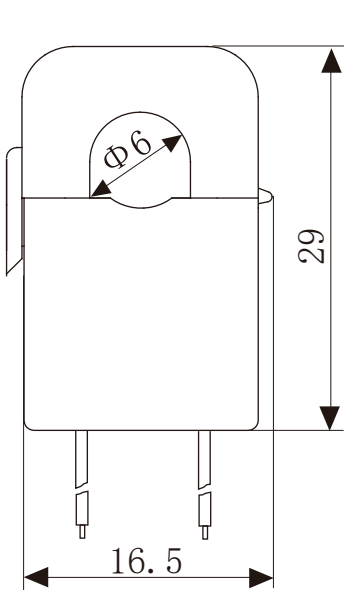

Front view

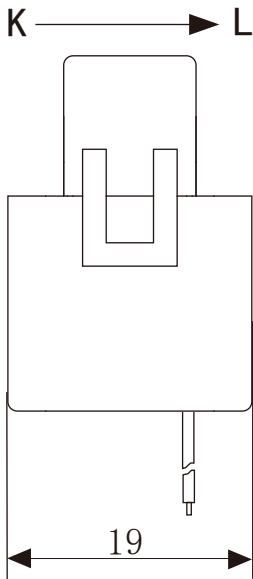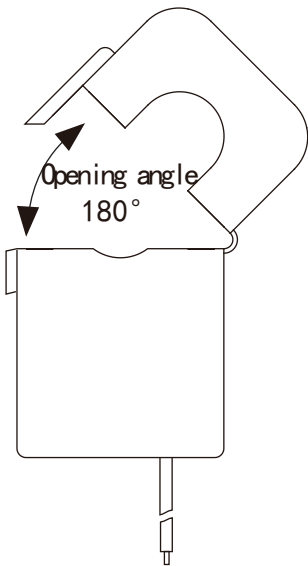

Side view

