

# SCT019 (V output type)



### Characteristics:

Safety lock buckle, easy installation.

Product picture printing is for reference only,

subject to the actual product

### Technical index:

Mounting type: Free hanging (In-Line)

Material of core: Permalloy

Applicable standards: GB20840-2014

Operating temperature: -25 °C ~ +70 °C


Storage temperature: -40 °C ~ +85 °C

Frequency range: 20Hz-1KHz

Dielectric strength: 3.5KV 50Hz 1min(enclosure/output)




Electrical parameters: The following parameters are typical values. The actual values shall be subject to the actual measurement of the product

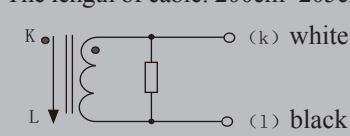
Rated input	50	100	150	200	A	Specifications of cable: 0.5mm <sup>2</sup> black and white twisted pair The length of cable: 200cm~205cm 
Rated output	0.333				V/AC	
Accuracy	0.5				%	
Weight	91				g	
Voltage output type Secondary is not allowed to short circuit						

### Dimensions (in mm ± 0.5) :

Opening and closing mode: plug-type

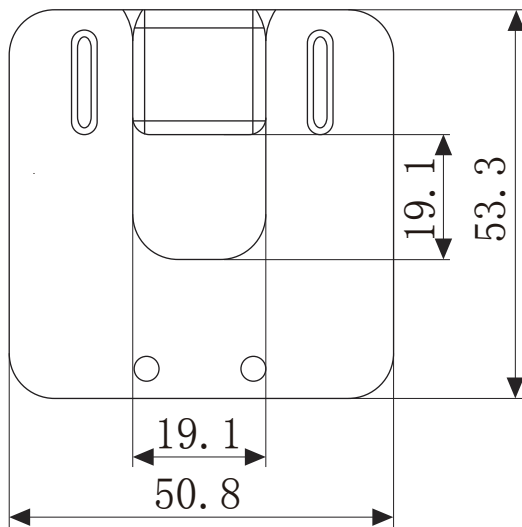

Front view

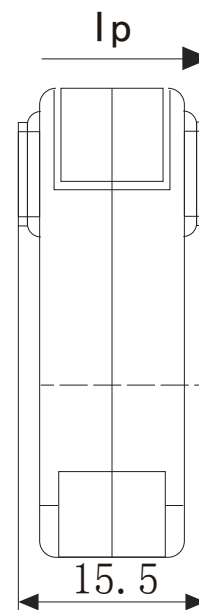

Side view