

SCT024TS (mAOutput type)



Characteristic:

Safety lock buckle, easy installation.

Technical index:

Mounting type: Free hanging (In-Line)
 Material of core: Laminated silicon steel
 Applicable standard: GB20840-2014
 Operating temperature: $-25^{\circ}\text{C} \sim +60^{\circ}\text{C}$
 Storage temperature: $-30^{\circ}\text{C} \sim +90^{\circ}\text{C}$
 Frequency range: 50Hz-60Hz
 Dielectric strength: 3.5KV 50Hz 1min

Product picture printing is for reference only,
 subject to the actual product




Electrical parameters: The following parameters are typical values. The actual values shall be subject to the actual measurement of the product

Rated input	50		100		200			300		400			A
Rated output	50	100	50	100	20	50	100	50	100	50	80	100	mA
Turns ratio	1:1000	1:500	1:2000	1:1000	1:10000	1:4000	1:1000	1:6000	1:3000	1:8000	1:5000	1:4000	-
Sampling resistance	20	10	20	10	50	20	10	20	10	20	20	8	Ω
Accuracy	1												%
Weight	204												g

TVS: Transient Voltage Suppressor (7.5V)
 Current output type
 Secondary is not allowed to open circuit

Dimension (in mm ± 0.5) :

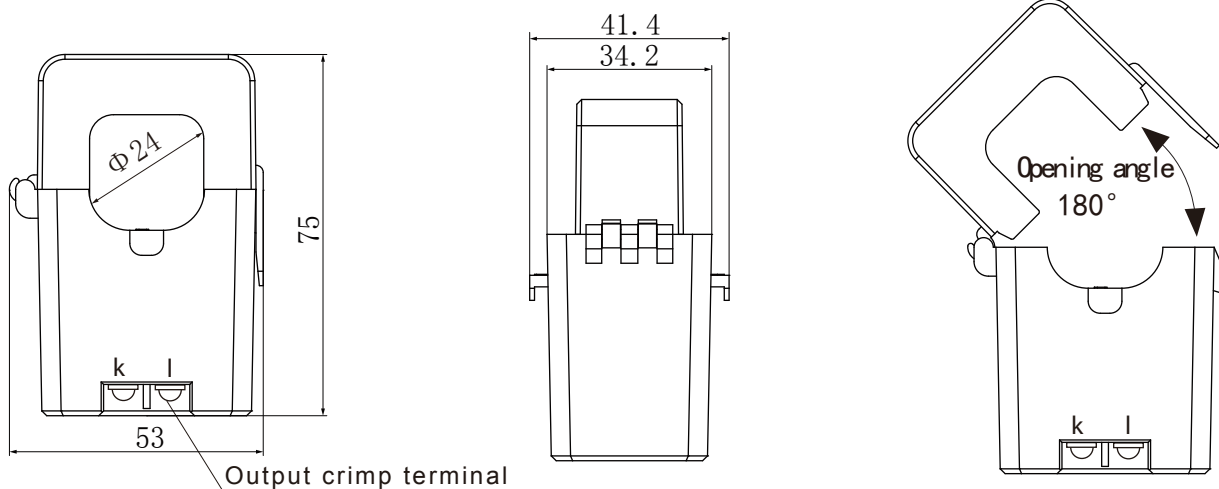

Front view

Side view