

Characteristic:

Safety lock buckle, easy installation, screw terminal output.


Product picture :(the printed words are for reference only, subject to the actual product)




Technical index:

- Mounting type: Free hanging (In-Line)
- Material of core: Ferrite
- Applicable standards: GB20840-2014
- Operating temperature: -25℃ ~ +60℃
- Storage temperature: -30℃ ~ +90℃
- Frequency range: 50Hz-1KHz
- Dielectric strength: Input (bare conductor)/Output AC 800V/1min 50Hz
Output/housing AC 3.5KV/1min 50Hz


Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Rated input	10	50		100				120		A		
Rated output	10	50	25	100	50	33	20	60	40	mA		
Turns ratio	1:1000	1:1000	1:2000	1:1000	1:3000	1:3000	1:4000	1:2000	1:3000	-		
Sampling resistance	5~10											Ω
Accuracy	1	0.5	0.2	1	0.2					%		
Phase shift	≤184′											′
Weight	70											g
											TVS: Transient Voltage Suppressor (7.5V) Current output type Secondary is not allowed to open circuit	


Dimensions (in mm±0.5):

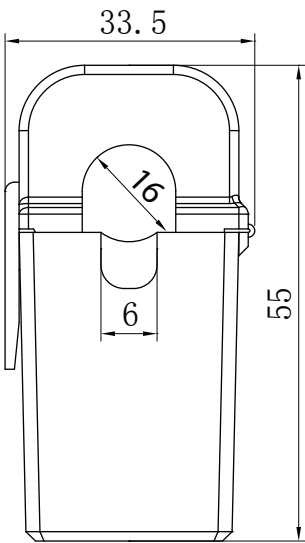

Front view

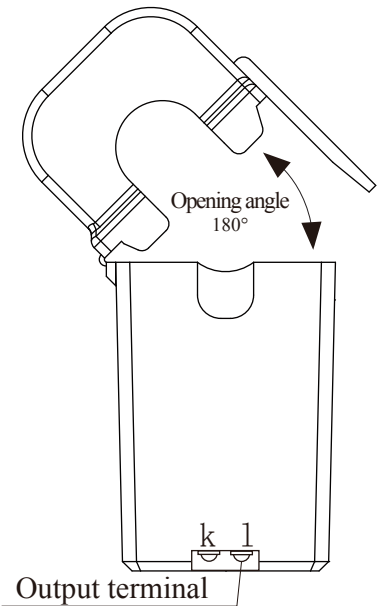

Output terminal

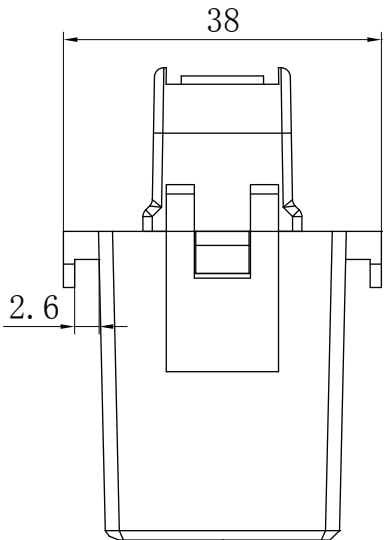

Side view