

Characteristic:

Safety lock buckle, easy installation.
Built-in rectifier, screw terminal output.

Technical index:

Mounting type: Free hanging (In-Line)
Material of core: Ferrite
Applicable standards: GB20840-2014
Operating temperature: -25℃ ~ +60℃
Storage temperature: -30℃ ~ +90℃
Frequency range: 50Hz-1KHz
Waterproof grade: IP00
Dielectric strength: Input (bare conductor)/Output AC 800V/1min 50Hz
Output/housing AC 3.5KV/1min 50Hz


Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Rated input	5	10	20	30	50	A
Rated output	1/3/5					V/DC
Accuracy	1					%
Phase shift	≤184'					'
Weight	45					g

Product picture :(the printed words are for reference only, subject to the actual product)




Schematic diagram:

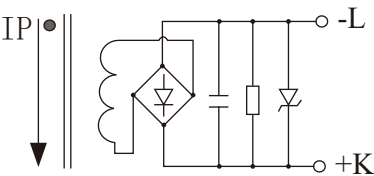


Voltage output type
Secondary is not allowed to short circuit


Dimensions (in mm±0.5) :

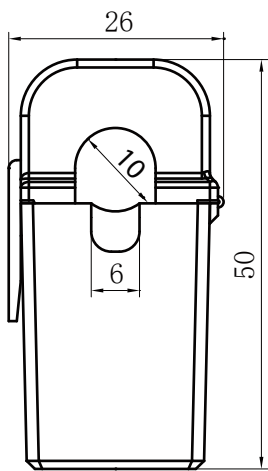

Front view

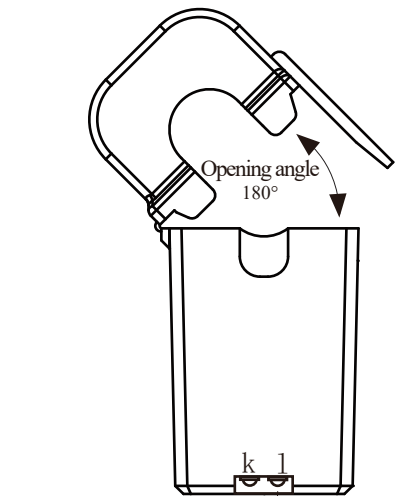

Output screw terminal

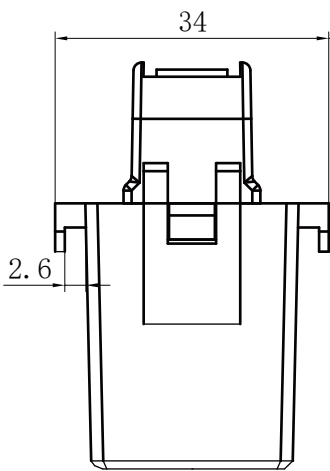

Side view