

SCT036TS-D (DC votage output type)



Characteristic:

Safety lock clasp, easy installation.
Built-in rectifier, screw terminal output.

Technical index:

Mounting type: Free hanging (In-Line)
Material of core: Laminated silicon steel
Applicable standards: GB20840-2014
Operating temperature: -25℃ ~ +60℃
Storage temperature: -30℃ ~ +90℃
Frequency range: 50Hz-60Hz
Waterproof grade: IP00
Dielectric strength: 3.5KV 50Hz 1min


Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Input current	100	200	300	400	500	A
Output voltage	1/3/5					V/DC
Accuracy	1					%
Weight	310					g

Product picture :(the printed words are for reference only, subject to the actual product)




Schematic diagram:

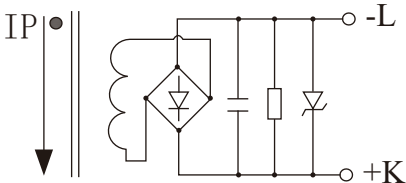


Voltage output type
Secondary is not allowed to short circuit

Dimensions (in mm±0.5):

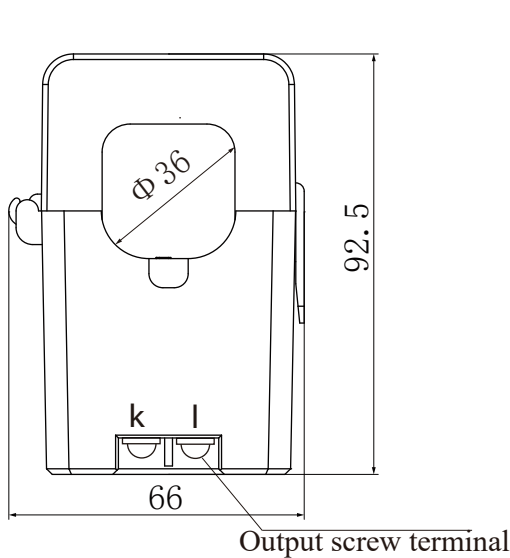

Front view

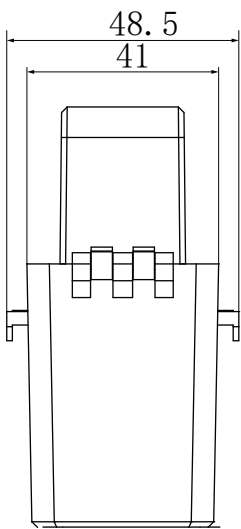

Side view

