

Characteristic:

Safety lock buckle, easy installation,screw terminal output.

Product picture :(the printed words are for reference only, subject to the actual product)

Technical index:

- Mounting type: Free hanging (In-Line)
- Material of core: Ferrite
- Applicable standards: GB20840-2014
- Operating temperature: -25℃ ~+60℃
- Storage temperature: -30℃ ~+90℃
- Frequency range: 50Hz-1KHz
- Waterproof grade: IP00
- Dielectric strength: Input (bare conductor)/Output AC 800V/1min 50Hz
- Output/housingAC 3.5KV/1min 50Hz




Electrical parameters: ( The following parameters are typical values and actual values will be subject to product testing )


|                     |        |         |        |         |         |         |        |         |         |    |
|---------------------|--------|---------|--------|---------|---------|---------|--------|---------|---------|----|
| Rated input         | 20     |         | 50     |         |         | 60      | 80     |         |         | A  |
| Rated output        | 20     | 10      | 50     | 25      | 16.6    | 20      | 80     | 40      | 26.6    | mA |
| Turns ratio         | 1:1000 | 1:2000  | 1:1000 | 1:2000  | 1:3000  | 1:3000  | 1:1000 | 1:2000  | 1:3000  | -  |
| Accuracy            | 0.5    | 0.5/0.2 | 0.5    | 0.5/0.2 | 0.5/0.2 | 0.5/0.2 | 0.5    | 0.5/0.2 | 0.5/0.2 | %  |
| Sampling resistance | 10     |         |        |         |         |         |        |         |         | Ω  |
| Phase shift         | ≤184'  |         |        |         |         |         |        |         |         | '  |
| Weight              | 45     |         |        |         |         |         |        |         |         | g  |

TVS: Transient Voltage Suppressor (7.5V)  
Current output type  
Secondary is not allowed to open circuit


Dimensions ( in mm±0.5 ) :

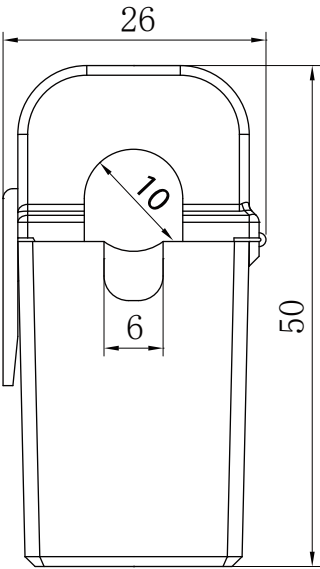

Front view

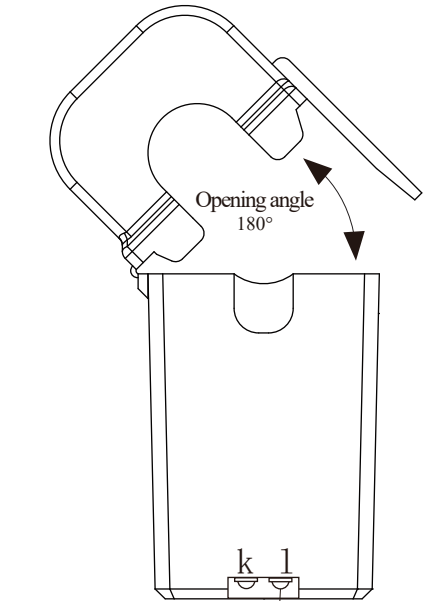

Output screw terminal

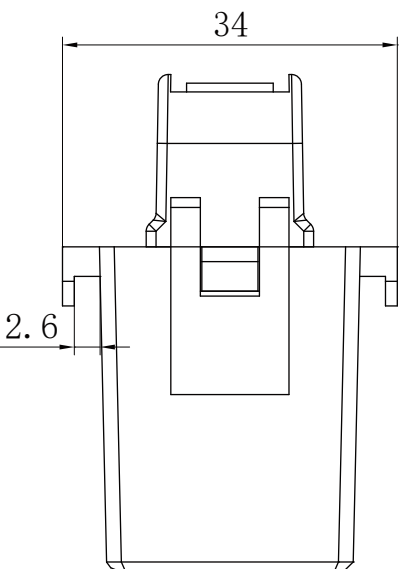

Side view