

Characteristic:

Safety lock buckle, easy installation, screw terminal output.


Product picture :(the printed words are for reference only, subject to the actual product)

Technical index:


- Mounting type: Free hanging (In-Line)
- Material of core: Laminated silicon steel
- Applicable standards: GB20840-2014
- Operating temperature: -25℃ ~ +60℃
- Storage temperature: -30℃ ~ +90℃
- Frequency range: 50Hz-60Hz
- Waterproof grade: IP00
- Dielectric strength: Input (bare conductor)/Output AC 800V/1min 50Hz
- Output/housing AC 3.5KV/1min 50Hz





Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Rated input	50	100	150	A	 Voltage output type Secondary is not allowed to short circuit
Rated output	0. 333/1/3/5			V/AC	
Accuracy	0. 5			%	
Weight	70			g	

Dimensions (in mm±0.5) :

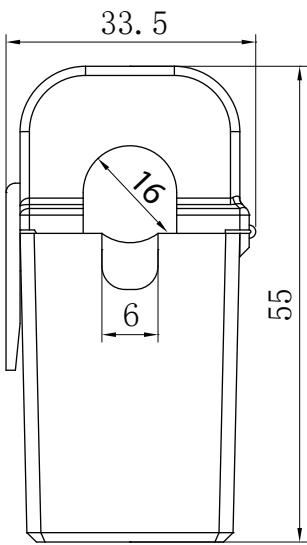

Front view

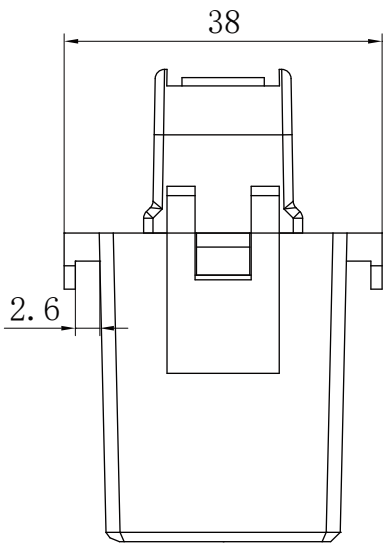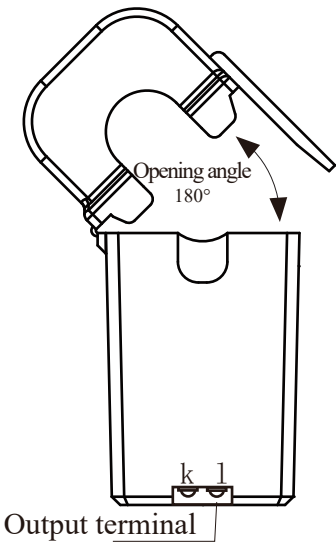

Side view