

SCT024TS (Volt output type)



Characteristic:

Safety lock buckle, easy installation, screw terminal output.


Product picture printing is for reference only,
subject to the actual product

Technical index:


- Mounting type:Free hanging (In-Line)
- Material of core: Laminated silicon steel
- Applicable standard:: GB20840-2014
- Operating temperature: -25℃ ~ +60℃
- Storage temperature: -30℃ ~ +90℃
- Frequency range: 50Hz-60Hz
- Waterproof grade: IP00
- Dielectric strength: 3.5KV 50Hz 1min

Electrical parameters:The following parameters are typical values. The actual values shall be subject to the actual measurement of the product




Rated input	50	100	200	300	400	A	 Voltage output type Secondary is not allowed to short circuit
Rated output	0.333/1/3/5					V/a c	
Accuracy	0.5					%	
Weight	204					g	

Dimension (in mm±0.5) :

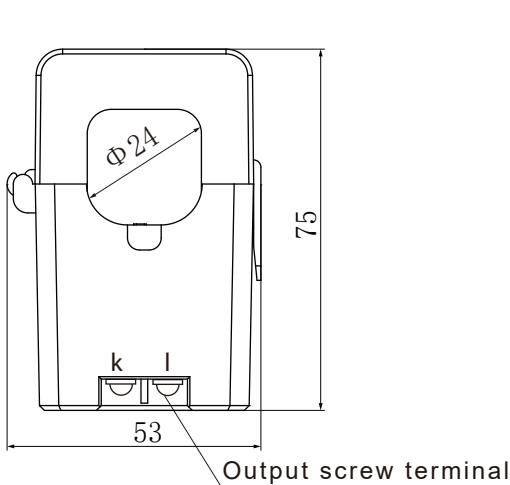

Front view

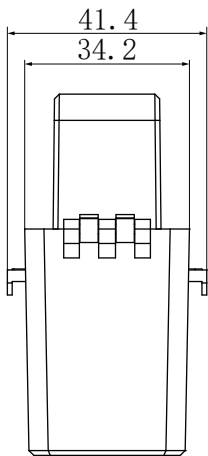

Side view

