

SCT019S(mA output type)



Characteristics:

Safety lock buckle, easy installation.

Technical index:

Mounting type: Free hanging (In-Line)

Material of core: Laminated silicon steel

Applicable standards: GB20840-2014

Operating temperature: -25℃ ~ +70℃

Storage temperature: -40℃ ~ +85℃

Frequency range: 50Hz-60Hz

Waterproof grade: IP00

Dielectric strength: 3.5KV 50Hz 1min(enclosure/output)

Electrical parameters:The following parameters are typical values. The actual values shall be subject to the actual measurement of the product

Product picture printing is for reference only,
subject to the actual product




Rated input	100	200	300	A
Rated output	33	33	33	mA
Turns ratio	1:3000	1:6000	1:9000	-
Sampling resistance	10	20	20	Ω
Accuracy	1			%
Weight	107			g

Specifications of cable:
0.5mm² black and white parallel lines
The length of cable: 200cm~205cm


TVS Transient voltage suppressor(7.5V)
Current output type
Secondary is not allowed to open circuit

Dimensions (in mm±0.5) :

Opening and closing mode: plug-type

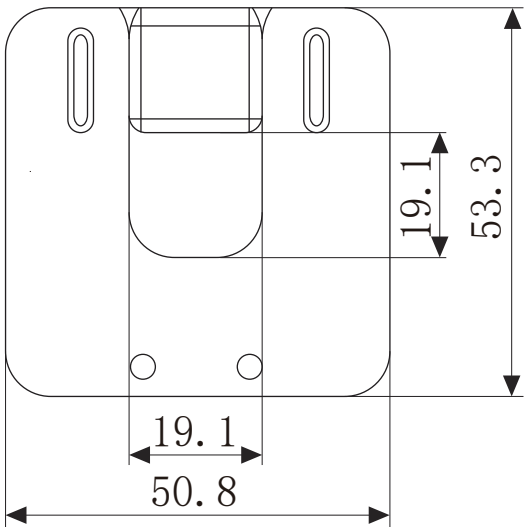

Front view

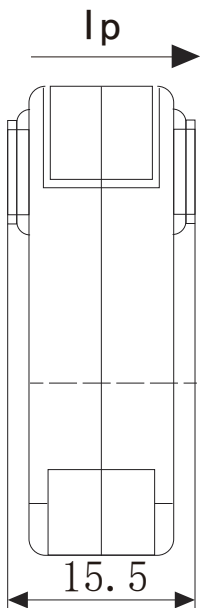

Side view