

SCT019S(V output type)



Characteristics:

Safety lock buckle, easy installation.

Product picture printing is for reference only,
subject to the actual product

Technical index:

Mounting type: Free hanging (In-Line)

Material of core: Laminated silicon steel

Applicable standards: GB20840-2014

Operating temperature: -25℃ ~ +70℃

Storage temperature: -40℃ ~ +85℃


Frequency range: 50Hz-60Hz

Waterproof grade: IP00

Dielectric strength: 3.5KV 50Hz 1min(enclosure/output)




Electrical parameters:The following parameters are typical values. The actual values shall be subject to the actual measurement of the product


Rated input	50	100	150	200	250	300	A	<div>Specifications of cable: 0.5mm² black and white parallel lines The length of cable: 200cm~205cm</div> <div></div> <div>Voltage output type Secondary is not allowed to short circuit</div>
Rated output	0.333						V/a c	
Accuracy	1						%	
Weight	107						g	

Dimensions (in mm±0.5) :

Opening and closing mode: plug-type

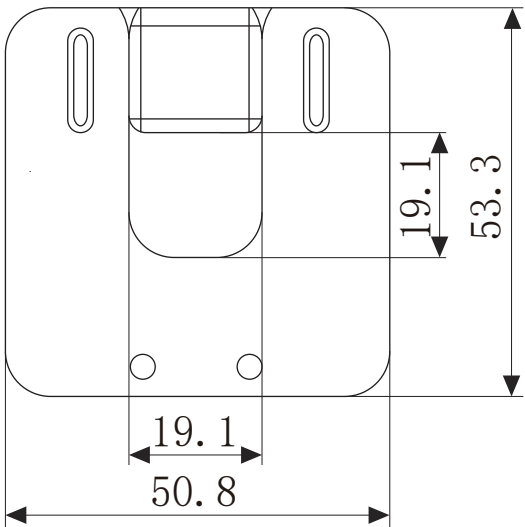

Front view

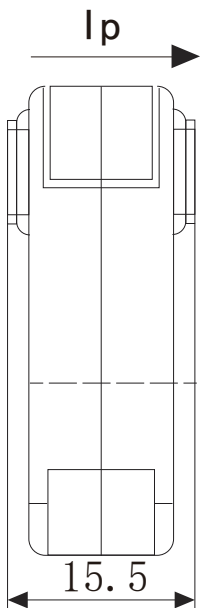

Side view