

SCT019(V output type)



Characteristics:

Safety lock buckle, easy installation.

Product picture printing is for reference only,
subject to the actual product

Technical index:

Mounting type: Free hanging (In-Line)

Material of core: Permalloy

Applicable standards: GB20840-2014

Operating temperature: -25℃ ~ +70℃

Storage temperature: -40℃ ~ +85℃


Frequency range: 20Hz-1KHz

Waterproof grade: IP00

Dielectric strength: 3.5KV 50Hz 1min(enclosure/output)


Electrical parameters:The following parameters are typical values. The
actual values shall be subject to the actual measurement of the product

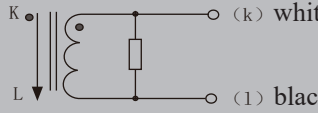


Rated input	50	100	150	200	A	Specifications of cable: 0.5mm² black and white parallel lines The length of cable: 200cm~205cm  Voltage output type Secondary is not allowed to short circuit
Rated output	0.333				V/AC	
Accuracy	0.5				%	
Weight	91				g	

Dimensions (in mm±0.5) :

Opening and closing mode: plug-type

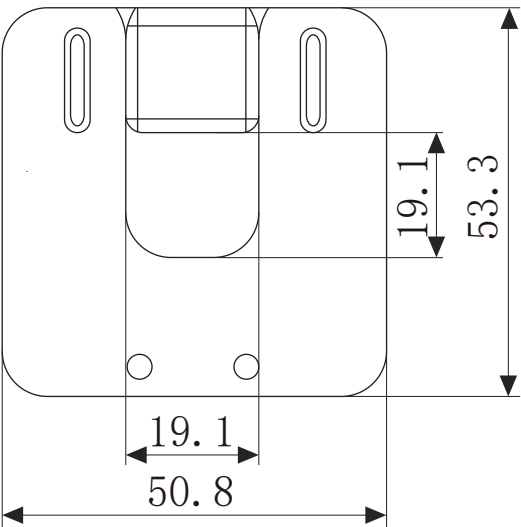

Front view

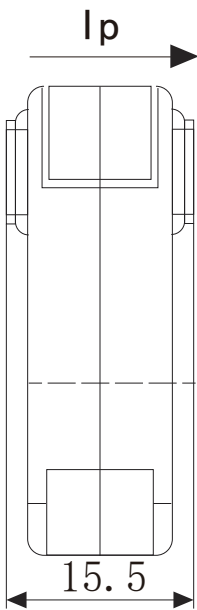

Side view