

Characteristics:

Safety lock buckle, easy installation.

Technical index:

Mounting type: Free hanging (In-Line)

Material of core: Laminated silicon steel

Applicable standards: GB20840-2014

Operating temperature: -25℃ ~ +70℃

Storage temperature: -40℃ ~ +85℃

Frequency range: 50Hz-60Hz

Waterproof grade: IP00

Dielectric strength: 3.5KV 50Hz 1min(enclosure/output)


Electrical parameters:The following parameters are typical values. The actual values shall be subject to the actual measurement of the product

Product picture printing is for reference only, subject to the actual product




Rated input	100	200	300	400	500	600	A
Rated output	0.333						V/AC
Accuracy	1						%
Weight	245						g

Specifications of cable:
0.3mm² black and white parallel lines
The length of cable: 100cm~105cm




Voltage output type
Secondary is not allowed to short circuit

Dimensions (in mm±0.5) :

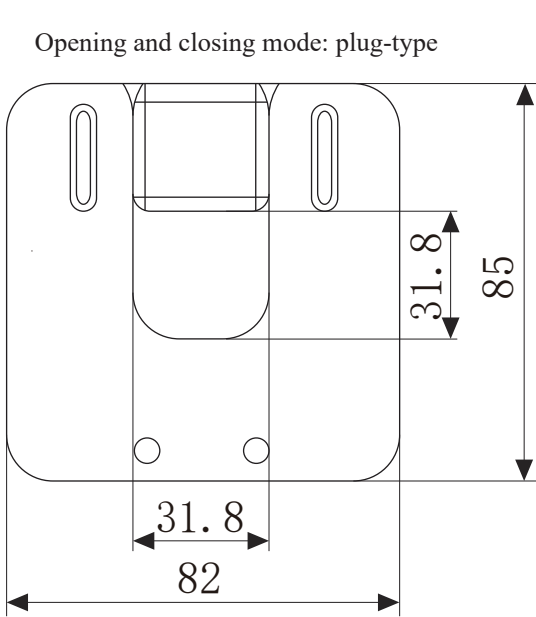

Front view

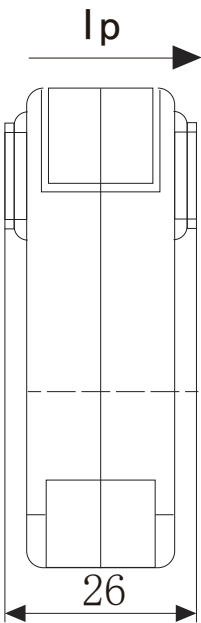

Side view