

Characteristic:

Safety lock buckle, easy installation.

Technical index:

Mounting type: Free hanging (In-Line)

Material of core: Laminated silicon steel

Applicable standard: GB20840-2014

Operating temperature: -25℃ ~ +70℃

Storage temperature: -40℃ ~ +85℃

Frequency range: 50Hz-60Hz

Waterproof grade: IP00

Dielectric strength: 3.5KV 50Hz 1min(enclosure/output)

Electrical parameters:The following parameters are typical values. The actual values shall be subject to the actual measurement of the product


Product picture printing is for reference only, subject to the actual product




Rated input	100A	200A	300A	400A	500A	600A	Cable specification: 0.5mm² black and white parallel lines Cable length:100cm~105cm (k) white (l) black TVS Transient voltage suppressor(7.5V) Current output type Secondary is not allowed to open circuit
Rated output	1A	1A	1A	1A	1A	1A	
Turns ratio	1:100	1:200	1:300	1:400	1:500	1:600	
Accuracy	1%						
Weight	473g						

Dimensions (in mm±0.5) :

Core opening and closing mode: rotary buckle type

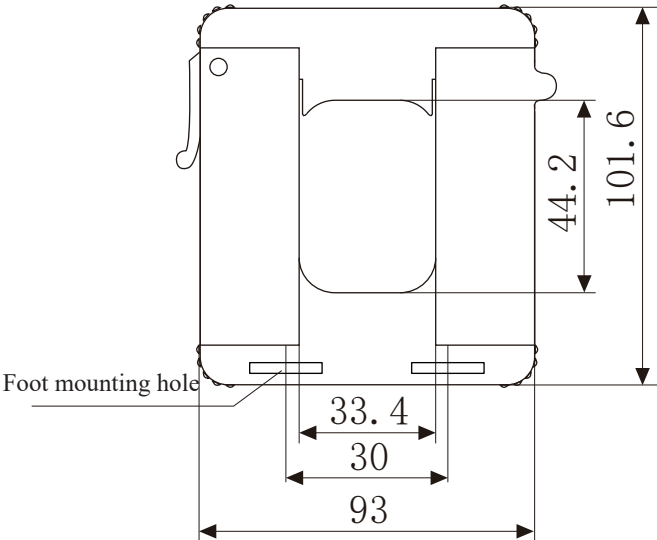

Front view

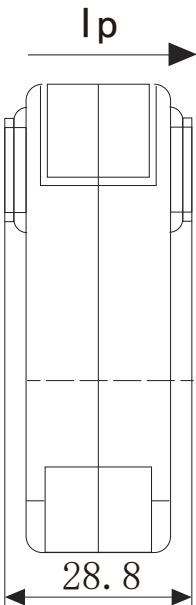

Side view