

# SCT024TS (5A output type)



### Characteristic:

Safety lock buckle, easy installation, screw terminal output.


Product picture printing is for reference only,  
subject to the actual product

### Technical index:


Mounting type:Free hanging (In-Line)  
Material of core: Laminated silicon steel  
Applicable standard:: GB20840-2014  
Operating temperature: -25℃ ~ +60℃  
Storage temperature: -30℃ ~ +90℃  
Frequency range: 50Hz-60Hz  
Waterproof grade: IP00  
Dielectric strength: 3.5KV 50Hz 1min




Electrical parameters:The following parameters are typical values. The actual values shall be subject to the actual measurement of the product

Rated input	100A		150A		200A		250A		300A		400A		
Rated output	5A		5A		5A		5A		5A		5A		
Turns ratio	1: 20		1: 30		1: 40		1: 50		1: 60		1: 80		
Accuracy	1%	3%	1%	3%	0.5%	1%	0.5%	1%	0.5%	1%	0.5%	1%	
Power	0.5VA	1VA	1VA	2.5VA	1VA	2.5VA	1VA	2.5VA	1VA	2.5VA	1VA	2.5VA	
Weight	204g												

### Dimension (in mm±0.5) :

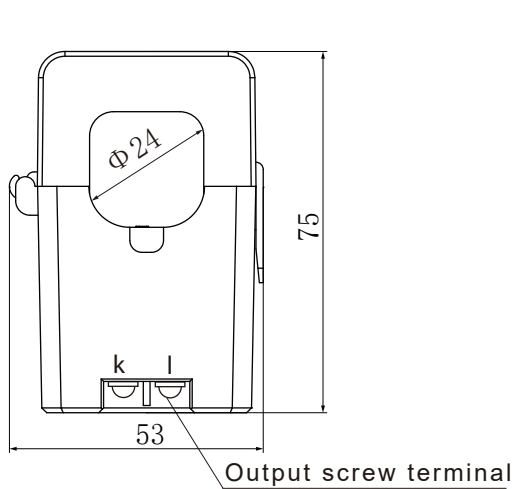

Front view

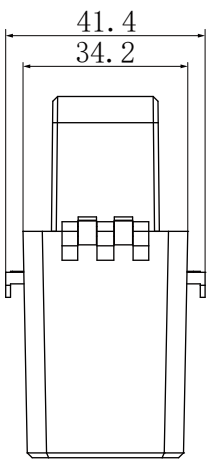

Side view

