

Characteristic:

Safety lock buckle, easy installation, cable output


Product picture printing is for reference only, subject to the actual product

Technical index:



- Mounting type: Free hanging (In-Line)
- Material of core: Ferrite
- Applicable standards: GB20840-2014
- Operating temperature: -25℃ ~ +70℃
- Storage temperature: -30℃ ~ +90℃
- Frequency range: 50Hz-1KHz
- Waterproof grade: IP00
- Dielectric strength: Input (bare conductor)/Output AC 800V/1min 50Hz
- Output/Housing AC 3.5KV/1min 50Hz




Electrical parameters:The following parameters are typical values. The actual values shall be subject to the actual measurement of the product

Rated input	5A	10A	15A	20A	25A	30A	50A	60A	100A	A	Specification of cable: 2 x 0.2mm² two core shielded cable Length of cable:100cm±3cm  Voltage output type Secondary is not allowed to short circuit
Rated output	1									V	
Accuracy	2									%	
Weight	50 g									g	

Dimensions(in mm±0.5) :

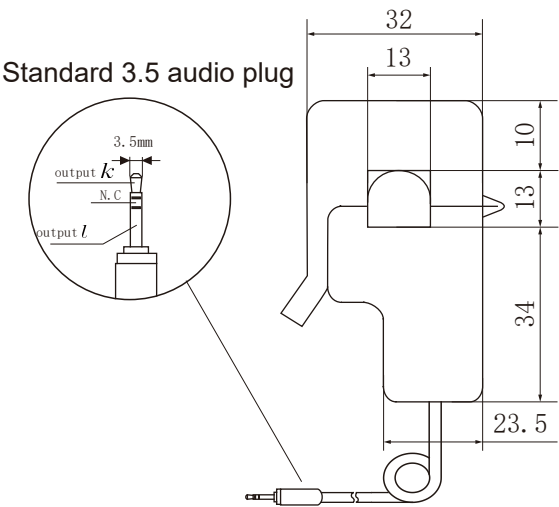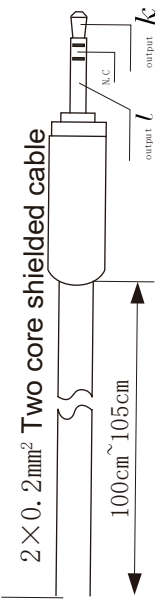

Front view

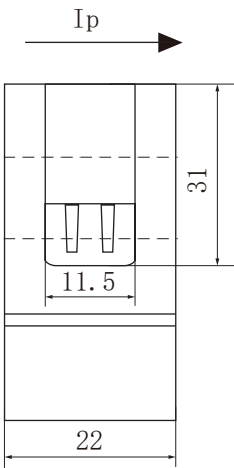

Side view

