

# SCT036TS (5A output type)



## Characteristic:

Safety lock buckle, easy installation, screw terminal output.

Product picture :(the printed words are for reference only, subject to the actual product)

## Technical index:


Mounting type: Free hanging (In-Line)  
 Material of core: Laminated silicon steel  
 Applicable standards: GB20840-2014  
 Operating temperature: -25℃ ~ +60℃  
 Storage temperature: -30℃ ~ +90℃  
 Frequency range: 50Hz-1KHz  
 Dielectric strength: 3.5KV 50Hz 1min




**Electrical parameters:** (The following parameters are typical values and actual values will be subject to product testing)

Rated input	100A	200A		300A		400A		500A		600A		
Rated output	5A	5A	5A	5A	5A	5A	5A	5A	5A	5A		
Turns ratio	1:20	1:40		1:60		1:80		1:100		1:120		
Accuracy	1%	0.5%	1%	0.5%	1%	0.5%	1%	0.5%	1%	0.5%	1%	
Power	1VA	2VA	5VA	2VA	5VA	2VA	5VA	2VA	5VA	2VA	5VA	
Weight	310g											

## Dimensions (in mm ± 0.5) :

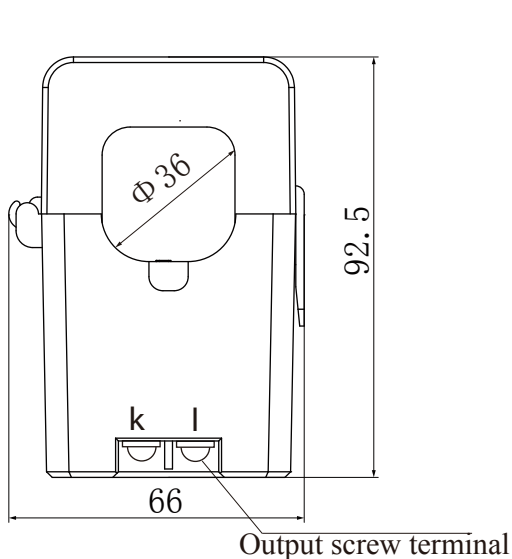

Front view

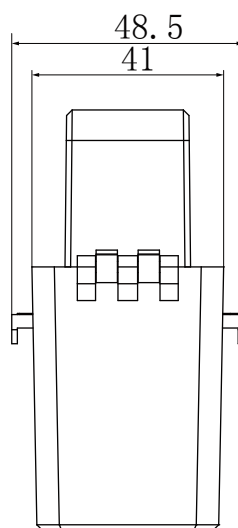

Side view

