

SCT036TS (Volt output type)



Characteristic:

Safety lock buckle, easy installation, screw terminal output.

Product picture : (the printed words are for reference only, subject to the actual product)

Technical index:

Mounting type: Free hanging (In-Line)

Material of core: Laminated silicon steel

Applicable standards: GB20840-2014

Operating temperature: $-25^{\circ}\text{C} \sim +60^{\circ}\text{C}$

Storage temperature: $-30^{\circ}\text{C} \sim +90^{\circ}\text{C}$

Frequency range: 50Hz-60Hz

Waterproof grade: IP00


Dielectric strength: 3.5KV 50Hz 1min




Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Input current	100	200	300	400	500	600	A	<p>Voltage output type Secondary is not allowed to short circuit</p>
Output voltage	0.333/1/3/5						V/AC	
Accuracy	0.5/1						%	
Weight	310						g	

Dimensions (in mm ± 0.5):

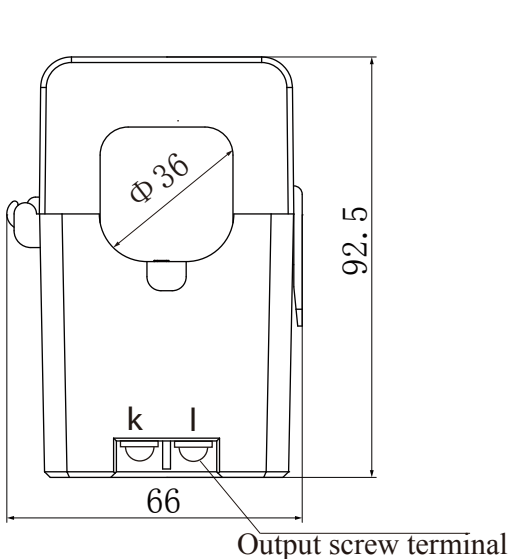

Front view

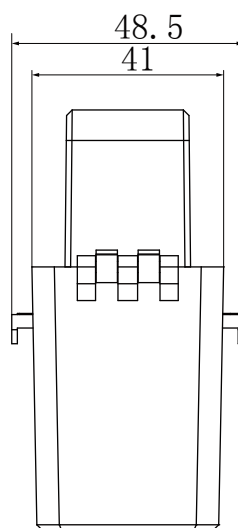

Side view

