

SCT036TS(Volt output type)



Characteristic:

Safety lock buckle, easy installation, screw terminal output.


Product picture :(the printed words are for reference only, subject to the actual product)

Technical index:


- Mounting type:Free hanging (In-Line)
- Material of core: Laminated silicon steel
- Applicable standards: GB20840-2014
- Operating temperature: -25℃ ~+60℃
- Storage temperature: -30℃ ~+90℃
- Frequency range: 50Hz-60Hz
- Waterproof grade: IP00
- Dielectric strength: 3.5KV 50Hz 1min




Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Input current	100	200	300	400	500	600	A	 Voltage output type Secondary is not allowed to short circuit
Output voltage	0.333/1/3/5						V/AC	
Accuracy	0.5						%	
Weight	310						g	

Dimensions (in mm±0.5) :

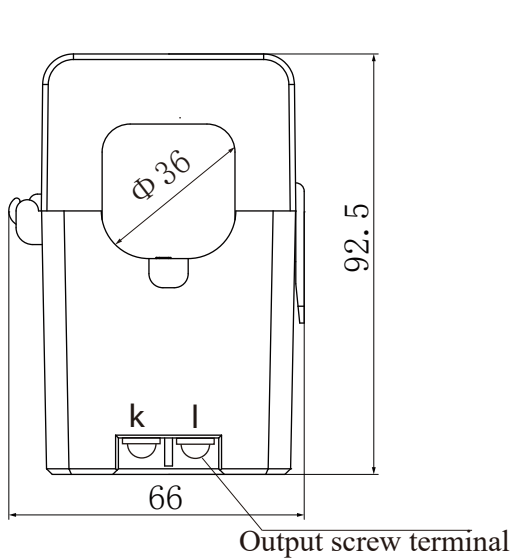

Front view

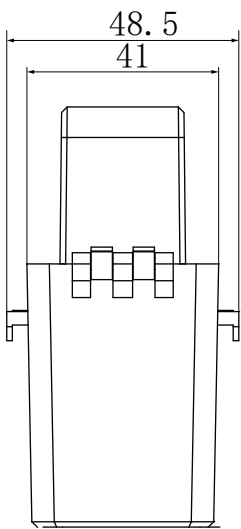

Side view

