

Model:PE2812S-I

Characteristics:

Vacuum Epoxy Encapsulated,PCB mounting,open loop circuit can be allowed in the secondary,Pirmary voltage:110V/220V/230V,or producing as customerized.

Technical Index:

Technical Index: PCB


Flame resistance : UL94-V0

Insulation class: B

Operation temperature: -30°C~+70°C

Work frequency: 50Hz~60Hz

Dielectric strength: 3.75KV 50Hz 1min

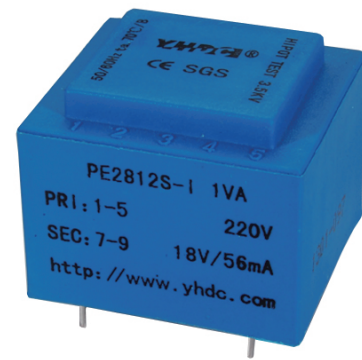


Technical Parameters table:

Primary voltage	110/220/230	V
Primary voltage range	±10	%
Voltage regulation	≤24	%
Power	1.5	VA
Temperature rising	≤18	°C
No load loss	≤0.4	W
weight	71	g

Secondary voltage		Secondary no load voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	8.7V	8.7V×2	200mA	100mA×2
7.5V	7.5V×2	11.6V	11.6V×2	160mA	80mA×2
9V	9V×2	12.8V	12.8V×2	133mA	67mA×2
12V	12V×2	17.8V	17.8V×2	100mA	50mA×2
15V	15V×2	21.3V	21.3V×2	80mA	40mA×2
18V	18V×2	26.9V	26.9V×2	66mA	33mA×2
24V	24V×2	34.8V	34.8V×2	50mA	25mA×2

Schematic Diagram:

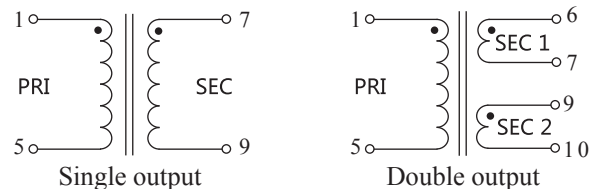

Dimension (in mm) :

