

TA20 Through core type precision current transformer



Characteristics:

Epoxy resin encapsulated, Nanocrystalline core, mini outline size, fully enclosed. Electrical load remote monitoring, as the input signal of electric control system, lack of phase indicating, electrical energy measuring, motor monitoring.

Technical index:

Mounting type: PCB
 Material of the core: Nanocrystalline
 Flame resistance: UL94-V0
 Execution standard: GB20840-2014
 Operating temperature: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
 Storage temperature: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
 Frequency range: 20Hz-20KHz
 Dielectric strength: 3.5KV 50Hz 1min


Product picture : (the printed words are for reference only, subject to the actual product)



Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Model	TA20 -100	TA20 -150	TA20 -200	Unit
Rated input	20	30	40	A
Rated output	20	20	20	mA
Turns ratio	1: 1000	1: 1500	1: 2000	
Linearity	≤ 0.2	≤ 0.2	≤ 0.2	%
Sampling resistance	400	500	600	Ω
Weight	43	43	43	g

Schematic diagram:

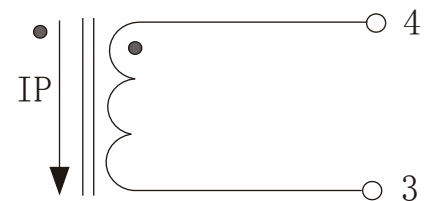

current output type.
 the secondary is not allowed to open.

(Feet 1 and 2 are empty)

Dimensions (in mm ± 0.5) :

