

# TA1610P Through core type precision current transformer **YHDC**® 1992

## Characteristics:

Epoxy potting, silicon steel core, small size, fully enclosed, electrical load remote monitoring, as the input signal of the electronic control system, phase loss indication, electricity measurement, motor running state monitoring.

## Technical index:

- Mounting type: Plate installation
- Material of the core: Silicon steel sheet
- Flame resistance: UL94-V0
- Execution standard: GB20840-2014
- Operating temperature: -20°C ~ +70°C
- Storage temperature: -30°C ~ +80°C
- Frequency range: 50Hz-60Hz
- Dielectric strength: 3.5KV 50Hz 1min


Product picture : (the printed words are for reference only, subject to the actual product)



**Electrical parameters:** ( The following parameters are typical values and actual values will be subject to product testing )

Model	TA1610P	Unit
Rated input	80	A
Rated output	100	mA
Turns ratio	1: 800	
Linearity	≤ 0.5	%
Sampling resistance	50	Ω
Weight	12	g

## Schematic diagram:

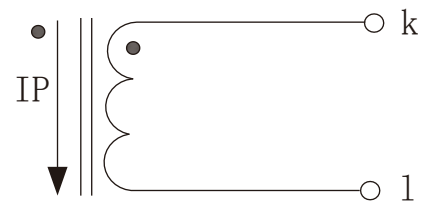

current output type.  
the secondary is not allowed to open.

## Dimensions ( in mm ± 0.5 ) :

