

3TA020BL



Characteristic: full sealed, Epoxy encapsulated,
High dielectric strength, Three-phase current combination
detection , Iron core.

Technical Index:


- Mounting type: Suspend
- Core material: Silicon steel sheet
- Fair resistance: with UL94-V0
- Complaint with: GB1208-2006
- Operating temperature: $-35^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- Storage temperature: $-45^{\circ}\text{C} \sim +95^{\circ}\text{C}$
- Frequency range: 50Hz-60Hz
- Dielectric strength: 3.5KV 50Hz 1min



Technical Parameters table:

Model	3TA020BL -200	3TA020BL -300	3TA020BL -400
Rated Input	100A	150A	200A
Rated output	50mA	50mA	50mA
Change ratio	1:2000	1:3000	1:4000
Max. sampling resistance	20 Ω		
Linearity	$\leq 0.5\%$		
weight	248g		

Schematic Diagram:

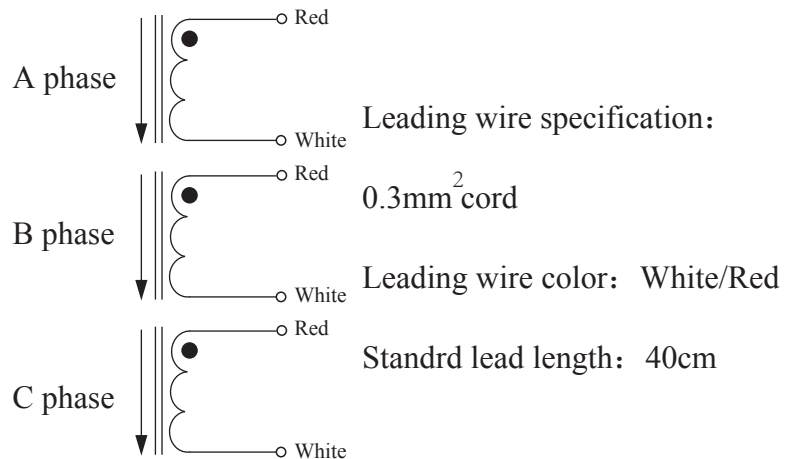

Dimensions(in mm ± 0.5) :

