

Model:PE4820-M

Characteristics:

1. Vacuum epoxy sealing, 100 °C/6 hours high temperature aging, life span of 20 years, high electrical strength
2. High quality H18 silicon steel sheet, low temperature rise, high efficiency
- 3.PBT engineering plastic, environmental protection, flame retardant, 120 degrees no deformation
4. Reasonable structure, convenient installation, low noise, strong seismic, sealed waterproof, moisture-proof



Technical Index:

Technical Index: PCB

Flame resistance : UL94-V0

Insulation class: B

Operation temperature: -30°C~+40°C

Work frequency: 50Hz~60Hz


Dielectric strength: Pri./Sec. 3.75KV 50Hz 1min 5mA,Sec/Sec 500V 50Hz 1min 5mA

Technical Parameters table:

Primary voltage	110/220/230/380	V
Primary voltage range	±10	%
Voltage regulation	≤18	%
Power	12	VA
Temperature rising	≤18	°C
No load loss	≤0.9	W
weight	300	g

Secondary voltage		Secondary no load voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	7.2V	7.2V×2	2000mA	1000mA×2
7.5V	7.5V×2	9.1V	9.1V×2	1600mA	800mA×2
9V	9V×2	10.9V	10.9V×2	1333mA	666.5mA×2
12V	12V×2	14.6V	14.6V×2	1000mA	500mA×2
15V	15V×2	18.2V	18.2V×2	800mA	400mA×2
18V	18V×2	21.8V	21.8V×2	666.6mA	333.3mA×2
24V	24V×2	29V	29V×2	500mA	250mA×2

Schematic Diagram:

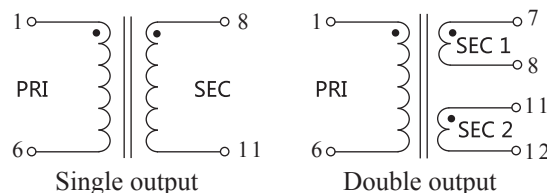

Dimension (in mm) :

