


PE3817-M



Characteristics:

1. Vacuum epoxy resin encapsulated, 100°C /6 hours high temperature aging, long working life 20 years and with high dielectric strength
2. High quality H18 laminated silicon steel, low temperature rise, high efficiency
3. PBT engineering plastic, environmental protection, flame retardant, 120 degrees no deformation
4. Reasonable structure, convenient installation, low noise, strong seismic, sealed waterproof, moisture-proof

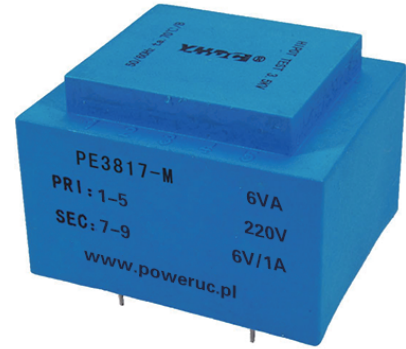

Technical index:

Mounting type: PCB

Flame resistance : UL94-V0

Insulation class: B

Operation temperature: -30°C ~ +40°C

Work frequency: 50Hz ~ 60Hz

Dielectric strength: Pri/Sec. 3.75KV 50Hz 1min 5mA, Sec/Sec 500V 50Hz 1min 5mA

Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)


Primary voltage	110/220/230/380	V
Primary voltage range	10	%
Voltage regulation	≤ 21	%
Power	6	VA
Temperature rising	≤ 24	°C
No-load loss	≤ 0.5	W
Weight	190	g

Standard output parameter table:

(Factory test is based on the full-load voltage)

Secondary output voltage		Secondary no-load Voltage		Secondary full-load current	
Single	Double	Single	Double	Single	Double
6V	6V × 2	7.3V	8.7V × 2	1000mA	500mA × 2
7.5V	7.5V × 2	10.6V	10.9V × 2	800mA	400mA × 2
9V	9V × 2	13V	13V × 2	667mA	334mA × 2
12V	12V × 2	17V	17.4V × 2	500mA	250mA × 2
15V	15V × 2	20.8V	21.2V × 2	400mA	200mA × 2
18V	18V × 2	24.4V	24.6V × 2	334mA	167mA × 2
24V	24V × 2	32.3V	32.3V × 2	250mA	125mA × 2

Schematic diagram:

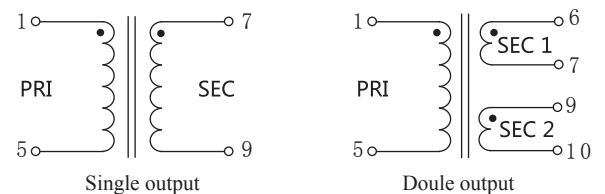

Dimension (in mm±0.5) :

