

### Characteristics:

1. Vacuum epoxy resin encapsulated, 100°C /6 hours high temperature aging, long working life 20 years and with high dielectric strength
2. High quality H18 laminated silicon steel, low temperature rise, high efficiency
3. PBT engineering plastic, environmental protection, flame retardant, 120 degrees no deformation
4. Reasonable structure, convenient installation, low noise, strong seismic, sealed waterproof, moisture-proof



### Technical index:

Mounting type: PCB

Flame resistance : UL94-V0

Insulation class: B

Operation temperature: -30°C ~ +40°C

Work frequency: 50Hz ~ 60Hz

Dielectric strength: Pri/Sec. 3.75KV 50Hz 1min 5mA, Sec/Sec 500V 50Hz 1min 5mA

**Electrical parameters:** ( The following parameters are typical values and actual values will be subject to product testing )


Primary voltage	110/220/230/380	V
Primary voltage range	±10	%
Voltage regulation	≤18	%
Power	12	VA
Temperature rising	≤18	°C
No-load loss	≤0.9	W
Weight	300	g

### Standard output parameter table:


( Factory test is based on the full-load voltage )

Secondary voltage		Secondary no-load voltage		Secondary full-load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	7.2V	7.2V×2	2000mA	1000mA×2
7.5V	7.5V×2	9.1V	9.1V×2	1600mA	800mA×2
9V	9V×2	10.9V	10.9V×2	1333mA	666.5mA×2
12V	12V×2	14.6V	14.6V×2	1000mA	500mA×2
15V	15V×2	18.2V	18.2V×2	800mA	400mA×2
18V	18V×2	21.8V	21.8V×2	666.6mA	333.3mA×2
24V	24V×2	29V	29V×2	500mA	250mA×2


### Schematic diagram:

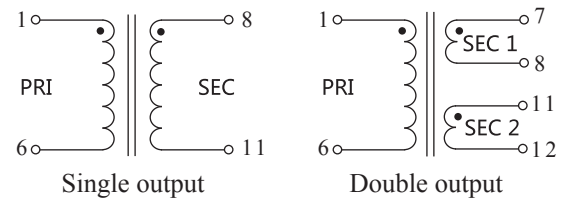

### Dimension ( in mm±0.5 ) :

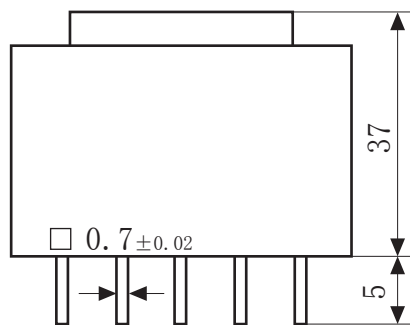

Front view

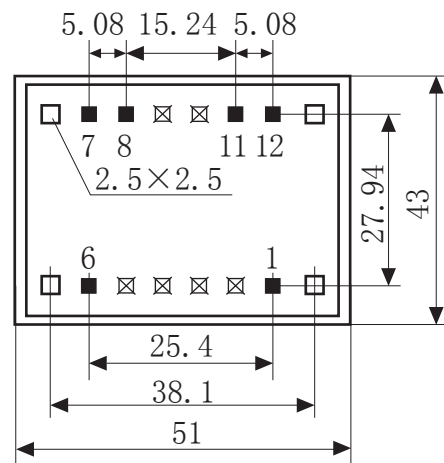

Bottom view