

### Characteristics:

1. Vacuum epoxy resin encapsulated, 100°C /6 hours high temperature aging, long working life 20 years and with high dielectric strength
2. High quality H18 laminated silicon steel, low temperature rise, high efficiency
3. PBT engineering plastic, environmental protection, flame retardant, 120 degrees no deformation
4. Reasonable structure, convenient installation, low noise, strong seismic, sealed waterproof, moisture-proof

### Technical index:

Mounting type: PCB

Flame resistance : UL94-V0

Insulation class: B

Operation temperature: -30°C ~ +70°C


Work frequency: 50Hz~60Hz

Dielectric strength: Pri/Sec. 3.75KV 50Hz 1min 5mA, Sec/Sec 500V 50Hz 1min 5mA


**Electrical parameters:** ( The following parameters are typical values and actual values will be subject to product testing )

Primary voltage	110/220/230/380	V
Primary voltage range	±10	%
Voltage regulation	≤20	%
Power	5	VA
Temperature rising	≤20	°C
No-load loss	≤0.6	W
Weight	185	g

### Dimension (in mm±0.5) :

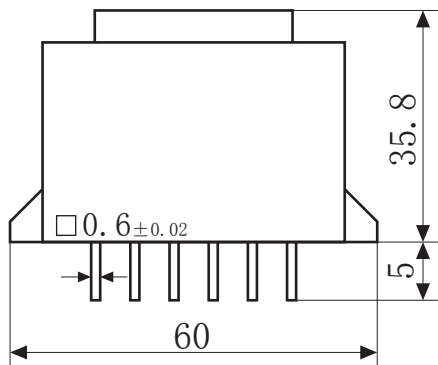

Front view

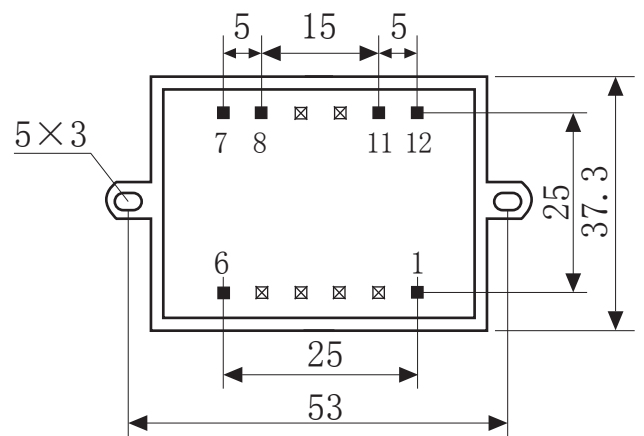

Bottom view



### Standard output parameter table:

( Factory test is based on the full-load voltage )

Secondary voltage		Secondary no-load voltage		Secondary full-load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	7.1V	7.1V×2	833mA	416.5mA×2
7.5V	7.5V×2	8.9V	8.9V×2	666mA	333mA×2
9V	9V×2	10.7V	10.7V×2	555mA	277.5mA×2
12V	12V×2	14.3V	14.3V×2	416mA	208mA×2
15V	15V×2	17.9V	17.9V×2	333mA	166.5mA×2
18V	18V×2	21.4V	21.4V×2	277mA	138.5mA×2
24V	24V×2	28.6V	28.6V×2	208mA	104mA×2

### Schematic diagram:

