

LTC series toroidal transformer



Model:LTC15

Characteristics:

Vacuum epoxy encapsulated, small dimension,light weight, high efficiency,low noise,wide application,lead type output. Primary working voltage:110×2/115×2(Can be customized according to customer's requirements)



Technical index:


Installation method:Sub-plate mount
 Flame resistance:UL94-V0
 Insulation class:B grade
 Work temperature:-30°C~+40°C
 Frequency range:50Hz~60Hz
 Dielectric strength:P/S: 4.5KV AC

Secondary voltage	Secondary no load voltage	Secondary full load current
9V×2	10.5V×2	0.83A×2
12V×2	14.0V×2	0.63A×2
15V×2	17.4V×2	0.50A×2
18V×2	0.42V×2	0.42A×2
22V×2	26V×2	0.34A×2


Electrical data:

Primary working voltage	110×2/115×2	V
Output power	15	VA
No-load loss	2.01	W
Weight		g


Connection diagram:

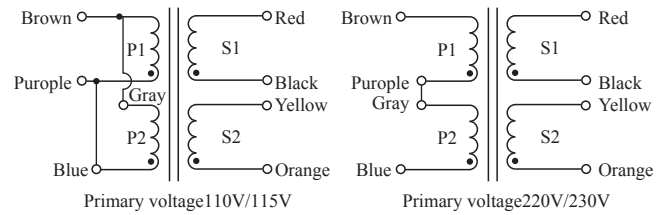

Dimension(mm):

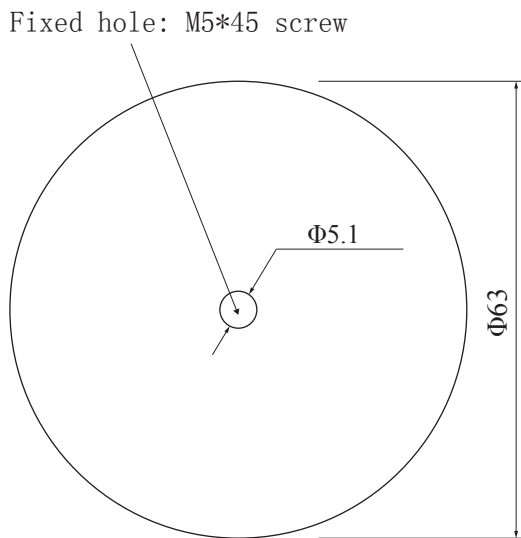

Front View

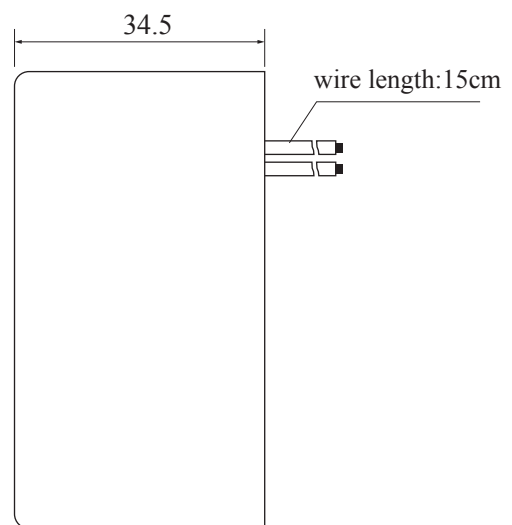

Side View