

# LTC series toroidal transformer



## Model:LTC30

### Characteristics:

Vacuum epoxy encapsulated, small dimension,light weight, high efficiency,low noise,wide application,lead type output.  
 Primary working voltage:110×2/115×2(Can be customized according to customer's requirements)



### Technical index:


Installation method:Sub-plate mount  
 Flame resistance:UL94-V0  
 Insulation class:B grade  
 Work temperature:-30°C~+40°C  
 Frequency range:50Hz~60Hz  
 Dielectric strength:P/S: 4.5KV AC

Secondary voltage	Secondary no load voltage	Secondary full load current
9V×2	10.6V×2	1.67A×2
12V×2	14.1V×2	1.25A×2
15V×2	17.6V×2	1.00A×2
18V×2	21.2V×2	0.83A×2
22V×2	26.0V×2	0.68A×2


### Electrical data:

Primary working voltage	110×2/115×2	V
Output power	30	VA
No-load loss	3.86	W
Weight		g


### Connection diagram:

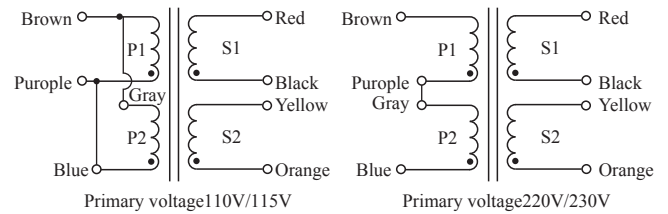

### Dimension(mm):

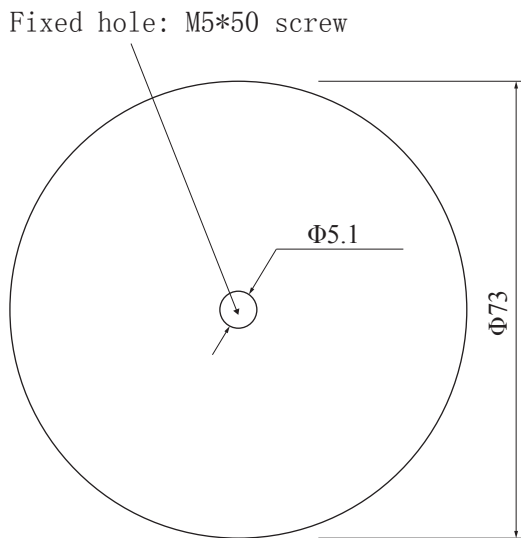

Front View

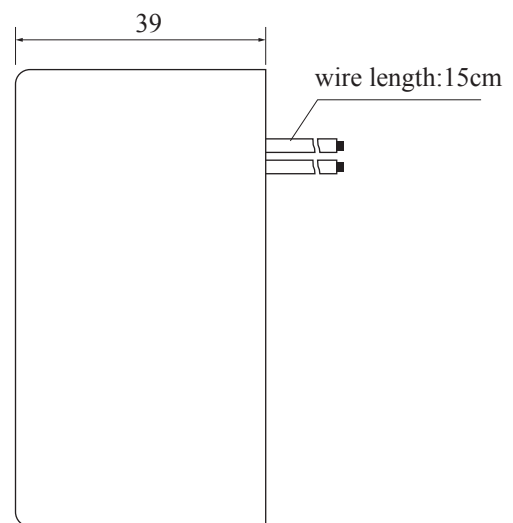

Side View