

LTC series toroidal transformer



Model:LTC50

Characteristics:

Vacuum epoxy encapsulated, small dimension,light weight, high efficiency,low noise,wide application,lead type output. Primary working voltage:110×2/115×2(Can be customized according to customer's requirements)



Technical index:


- Installation method:Sub-plate mount
- Flame resistance:UL94-V0
- Insulation class:B grade
- Work temperature:-30℃~+40℃
- Frequency range:50Hz~60Hz
- Dielectric strength:P/S: 4.5KV AC

Secondary voltage	Secondary no load voltage	Secondary full load current
9V×2	10.2V×2	2.78A×2
12V×2	13.6V×2	2.08A×2
15V×2	17.1V×2	1.67A×2
18V×2	20.4V×2	1.39A×2
22V×2	24.9V×2	1.14A×2


Electrical data:

Primary working voltage	110×2/115×2	V
Output power	50	VA
No-load loss	5.13	W
Weight		g


Connection diagram:

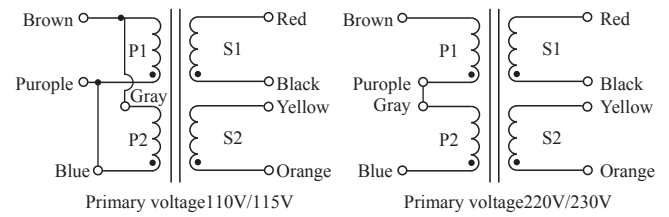

Dimension(mm):

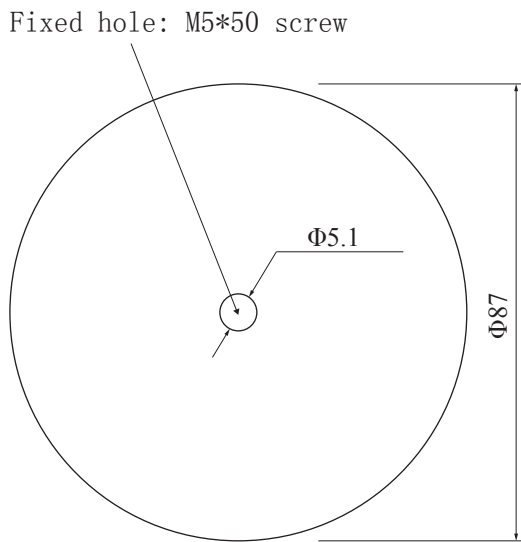

Front View

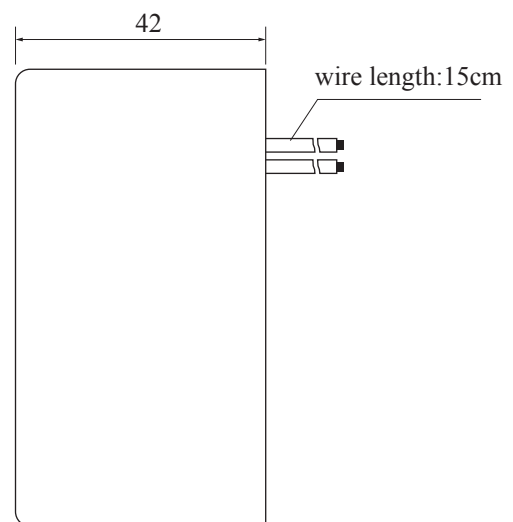

Side View