

Characteristics:

- 1.Vacuum epoxy encapsulated, 100℃/6 h high temperature aging, twenty years of life, high dielectrical strength.
- 2.High quality H18 silicon steel sheet,low temperature, high efficiency.
- 3.PBT engineering plastic, environmental protection, flame retardant, 120 degrees without deformation.
- 4.Reasonable structure, easy installation, low noise, strong earthquake, sealed waterproof, moistureproof.

Technical index:

- Mounting type: Sub-plate mount
- Flame resistance : UL94-V0
- Insulation class: B
- Waterproof class: IP67
- Wire length :85cm±5cm
- Operation temperature: -30℃ ~+40℃
- Work frequency: 50Hz~60Hz
- Dielectric strength: Pri/Sec 3.5KV 50Hz 1min 5mA
Sec/Sec 500V 50Hz 1min 5mA

Electrical parameters: The following parameters are typical values. The actual values shall be subject to the actual measurement of the product

Primary voltage	110V	220V	230V	380V	Unit
Primary voltage range	± 10				%
Power	120				VA
Voltage regulation	≤ 8				%
Temperature rise	≤ 40				℃
No-load loss	≤ 3. 5				W
Weight	2271				g


Product picture print for reference only, subject to the actual product



Standard output parameters table:
(Delivery is subject to full load voltage)

Secondary output voltage		Secondary no-load voltage		Secondary full-load current	
Single	Double	Single	Double	Single	Double
9V	—	9. 72V	—	13. 33A	—
12V	—	12. 9V	—	10A	—
15V	—	16. 2V	—	8A	—
18V	—	19. 4V	—	6. 66A	—
24V	—	25. 9V	—	5A	—

Schematic diagram:

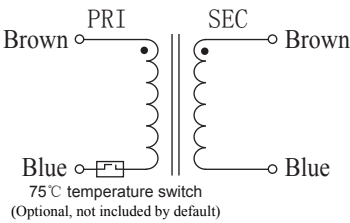

Dimensions (in mm±0.5)

