


PU series flat type isolation transformer



Model:PU3026B

Characteristics:

PCB mounting, low mounting height, Input: double
110V/double 115V(or producing as customerized).

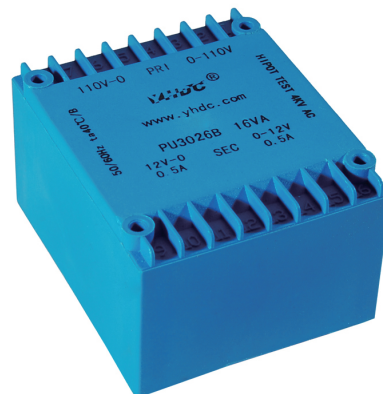

Technical Index:


Mounting type: PCB
Flame resistance : UL94-V0
Isulation class: B
Operation temperature: -30°C ~ +40°C
Work frequency: 50Hz ~ 60Hz
Dielectric strength: 4KV 50Hz 1min

Secondary voltage	Secondary no load voltage	Secondary full load current
6V×2	7.5V×2	1330mA×2
9V×2	10.9V×2	888mA×2
12V×2	14.6V×2	666mA×2
15V×2	18V×2	533mA×2
18V×2	21.5V×2	444mA×2
24V×2	27.5V×2	333mA×2


Technical Parameters table:

Primary voltage	110×2/115×2	V
Primary voltage range	±10	%
Voltage regulation	≤25	%
Power	16	VA
Temperature rising	≤30	°C
No load loss	≤1	W
weight	370	g

Schematic Diagram:

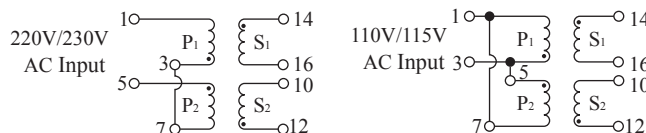

Dimension (in mm) :

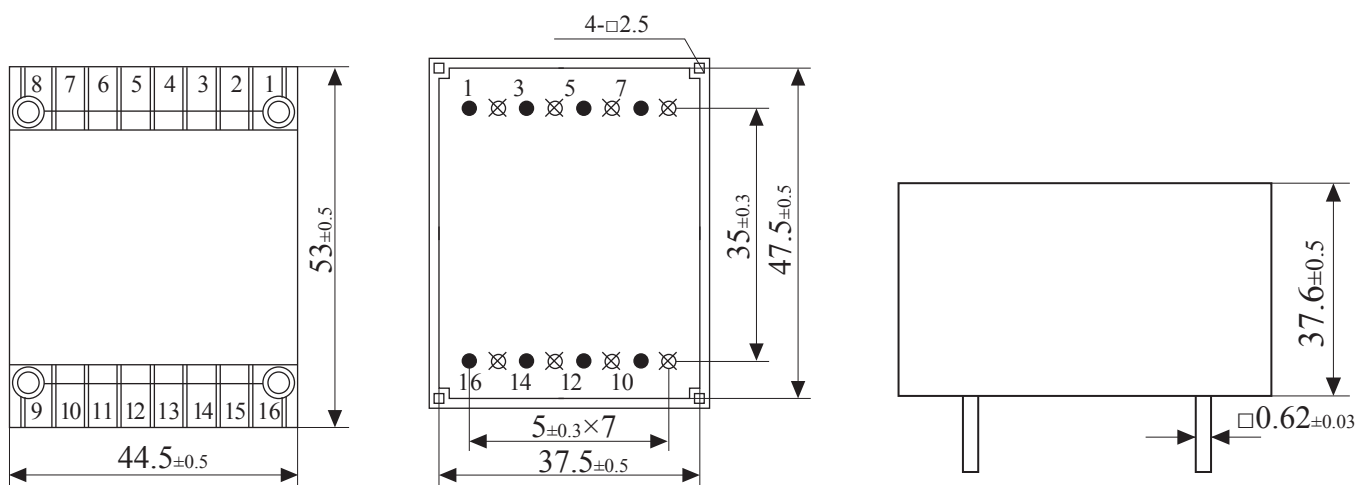

Top View

Bottom View

Side View