


PU series flat type isolation transformer



Model:PU3910BW

Characteristics:

PCB mounting, low mounting height, Mounting types of PU39BW and PU39B are a little different in dimension
 Input: double 110V/double 115V (or producing as customerized).

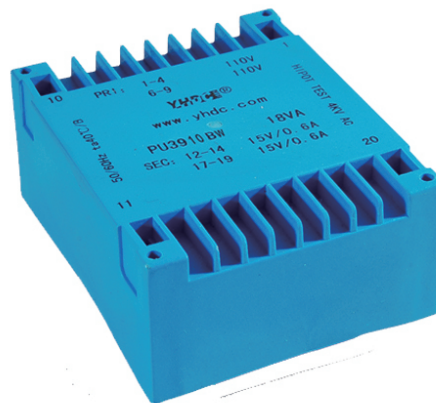

Technical Index:


Mounting type: PCB
 Flame resistance : UL94-V0
 Isolation class: B
 Operation temperature: $-30^{\circ}\text{C} \sim +40^{\circ}\text{C}$
 Work frequency: 50Hz~60Hz
 Dielectric strength: 4KV 50Hz 1min

Secondary voltage	Secondary no load voltage	Secondary full load current
6V×2	8.3V×2	1.16A×2
7.5V×2	10.3V×2	0.933A×2
9V×2	12.4V×2	0.778A×2
12V×2	16.4V×2	0.583A×2
15V×2	20.6V×2	0.467A×2
18V×2	24.7V×2	0.289A×2
24V×2	30V×2	0.291A×2

Technical Parameters table:

Primary voltage	110×2/115×2	V
Primary voltage range	±10	%
Voltage regulation	≤27	%
Power	14	VA
Temperature rising	≤25	°C
No load loss	≤1.1	W
weight	300	g

Schematic Diagram:

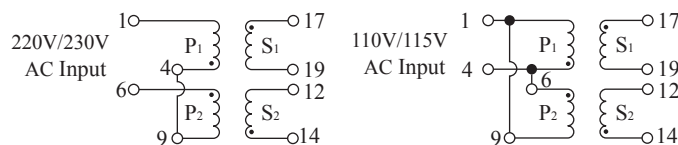

Dimension (in mm) :

