


# PU series flat type isolation transformer



Model:PU3921BW

## Characteristics:

PCB mounting, low mounting height, Mounting types of PU39BW and PU39B are a little different in dimension  
 Input: double 110V/double 115V (or producing as customerized).

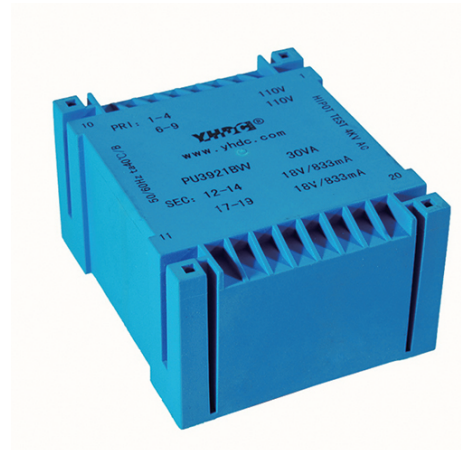

## Technical Index:


Mounting type: PCB  
 Flame resistance : UL94-V0  
 Isulation class: B  
 Operation temperature:  $-30^{\circ}\text{C} \sim +40^{\circ}\text{C}$   
 Work frequency: 50Hz~60Hz  
 Dielectric strength: 4KV 50Hz 1min

Secondary voltage	Secondary no load voltage	Secondary full load current
6V×2	8.1V×2	2.5A×2
7.5V×2	10.1V×2	2A×2
9V×2	11.3V×2	1.66A×2
12V×2	15.0V×2	1.25A×2
15V×2	18.6V×2	1A×2
18V×2	22.3V×2	0.833A×2
24V×2	28V×2	0.625A×2

## Technical Parameters table:

Primary voltage	110×2/115×2	V
Primary voltage range	±10	%
Voltage regulation	≤21	%
Power	30	VA
Temperature rising	≤35	°C
No load loss	≤2	W
weight	560	g

## Schematic Diagram:

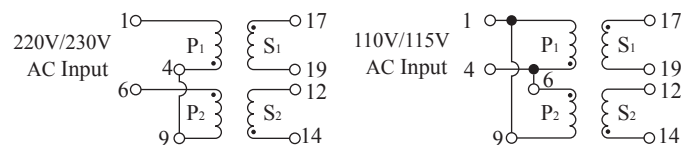

## Dimension (in mm) :

