

Characteristics:

1. Vacuum epoxy resin encapsulated, 100℃ /6 hours high temperature aging, long working life 20 years and with high dielectric strength
2. High quality H18 silicon steel sheet, low temperature rise, high efficiency
3. PBT engineering plastic, environmental protection, flame retardant, 120 degrees no deformation
4. Reasonable structure, convenient installation, low noise, strong seismic, sealed waterproof, moisture-proof

Technical index:

Mounting type: Plate mount

Flame resistance : UL94-V0

Insulation class: B

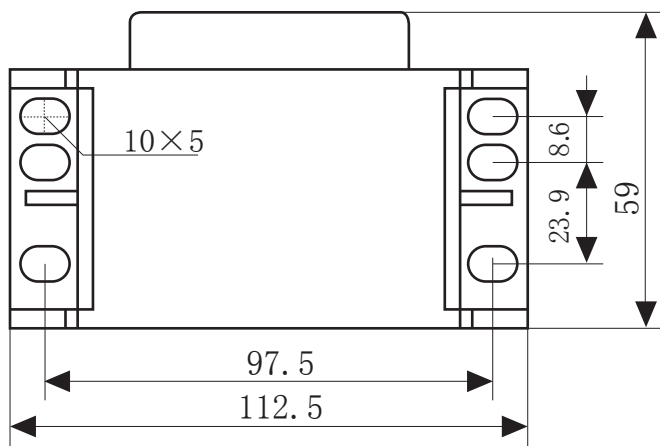
Operation temperature: -30℃~+40℃

Work frequency: 50Hz~60Hz

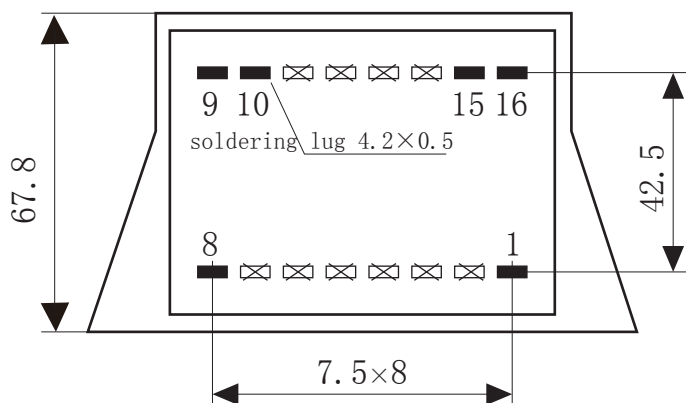
Dielectric strength: Pri/Sec. 3.75KV 50Hz 1min 5mA, Sec/Sec 500V 50Hz 1min 5mA

Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Primary voltage	110/220/230/380	V
Primary voltage range	±10	%
Voltage regulation	≤12	%
Power	80	VA
Temperature rising	≤40	℃
No-load loss	≤3	W
Weight	1400	g

Dimension (in mm±0.5) :

Bottom view



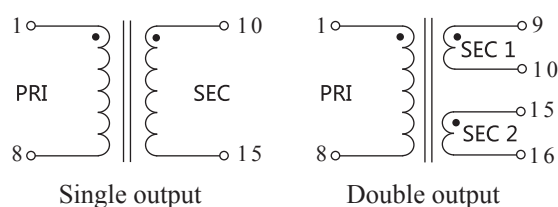
Front view

Product picture print for reference only,
subject to the actual product

Standard output parameters Table:

(Delivery is subject to full load voltage)

Secondary voltage		Secondary no-load voltage		Secondary full-load current	
Single	Double	Single	Double	Single	Double
7.5V	2×7.5V	8.25V	2×8.25V	10.7A	2×5.33A
9V	2×9V	9.9V	2×9.9V	8.89A	2×4.44A
12V	2×12V	13.2V	2×13.2V	6.66A	2×3.33A
15V	2×15V	16.5V	2×16.5V	5.33A	2×2.66A
18V	2×18V	19.8V	2×19.8V	4.44A	2×2.22A
24V	2×24V	26.4V	2×26.4V	3.33A	2×1.66A

Schematic diagram:

Single output

Double output