


Model:LKB8630-L

Product picture print for reference only,
subject to the actual product

Characteristics:

- 1. Vacuum epoxy resin encapsulated,100℃ /6 hours high temperature aging, long woking life 20 years and with high delectric strength
- 2. High quality H18 silicon steel sheet, low temperature rise, high efficiency
- 3.PBT engineering plastic, environmental protection, flame retardant, 120 degrees no deformation
- 4. Reasonable structure, convenient installation, low noise, strong seismic, sealed waterproof, moisture-proof



Technical index:

- Mounting type: Plate mount
- Flame resistance : UL94-V0
- Insulation class: B
- Operation temperature: -30℃ ~+40℃
- Work frequency: 50Hz~60Hz
- Dielectric strength: Pri./Sec. 3.75KV 50Hz 1min 5mA,Sec/Sec 500V 50Hz 1min 5mA


Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Primary voltage	110/220/230/380	V
Primary voltage range	±10	%
Voltage regulation	≤10	%
Power	100	VA
Temperature rising	≤40	℃
No-load loss	≤3	W
Weight	1800	g


Standard output parameters Table:
(Delivery is subject to full load voltage)

Secondary voltage		Secondary no-load voltage		Secondary full-load current	
Single	Double	Single	Double	Single	Double
6V	2×6V	6.7V	2×6.7V	16.67A	2×8.33A
7.5V	2×7.5V	8.25V	2×8.25V	13.33A	2×6.66A
9V	2×9V	9.9V	2×9.9V	11.11A	2×5.55A
12V	2×12V	13.2V	2×13.2V	8.33A	2×4.16A
15V	2×15V	16.5V	2×16.5V	6.66A	2×3.33A
18V	2×18V	19.8V	2×19.8V	5.55A	2×2.77A
24V	2×24V	26.4V	2×26.4V	4.16A	2×2.08A


Schematic diagram:

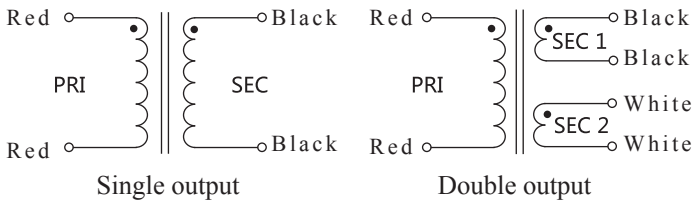


Dimension (in mm±0.5) :

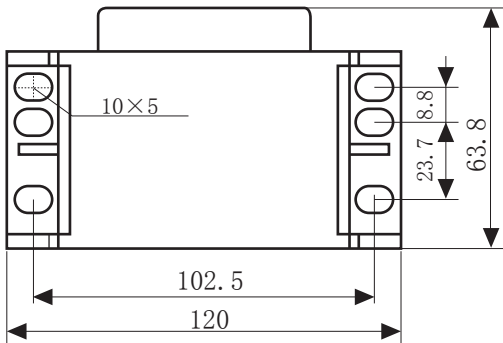

Bottom view

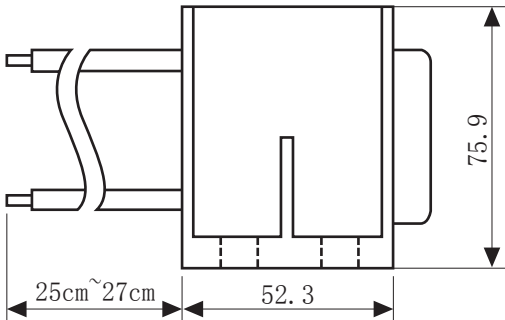

Side view

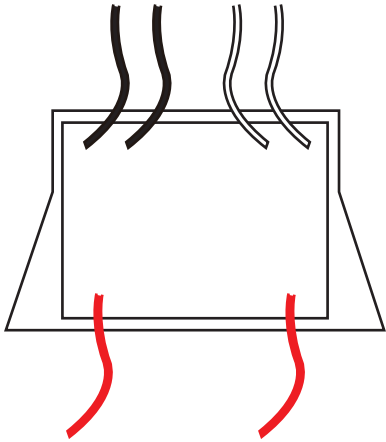

Front view