

Model:LKB4820B-L

Characteristics:

- 1. Vacuum epoxy resin encapsulated,100℃ /6 hours high temperature aging, long woking life 20 years and with high delectric strength
- 2. High quality H18 silicon steel sheet, low temperature rise, high efficiency
- 3.PBT engineering plastic, environmental protection, flame retardant, 120 degrees no deformation
- 4. Reasonable structure, convenient installation, low noise, strong seismic, sealed waterproof, moisture-proof


Technical index:

- Mounting type: Plate mount
- Flame resistance : UL94-V0
- Insulation class: B
- Operation temperature: -30℃~+40℃
- Work frequency: 50Hz~60Hz
- Dielectric strength: Pri./Sec. 3.5KV 50Hz 1min 5mA,Sec/Sec 500V 50Hz 1min 5mA

Electrical parameters:The following parameters are typical values. The actual values shall be subject to the actual measurement of the product

Primary voltage	110/220/230/380	V
Primary voltage range	±10	%
Voltage regulation	≤18	%
Power	12	VA
Temperature rising	≤18	℃
No-load loss	≤0.9	W
Weight	300	g


Product picture print for reference only,
subject to the actual product




Standard output parameters Table:
(Delivery is subject to full load voltage)

Secondary voltage		Secondary no-load voltage		Secondary full-load current	
Single	Double	Single	Double	Single	Double
6V	2×6V	7.2V	2×7.2V	2000mA	2×1000mA
7.5V	2×7.5V	9.1V	2×9.1V	1600mA	2×800mA
9V	2×9V	10.9V	2×10.9V	1333mA	2×666.5mA
12V	2×12V	14.6V	2×14.6V	1000mA	2×500mA
15V	2×15V	18.2V	2×18.2V	800mA	2×400mA
18V	2×18V	21.8V	2×21.8V	666.6mA	2×333.3mA
24V	2×24V	29V	2×29V	500mA	2×250mA


Schematic diagram:

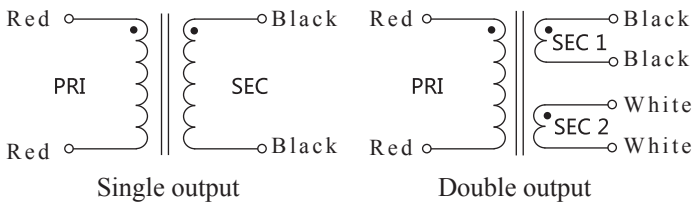


Dimension（in mm）：

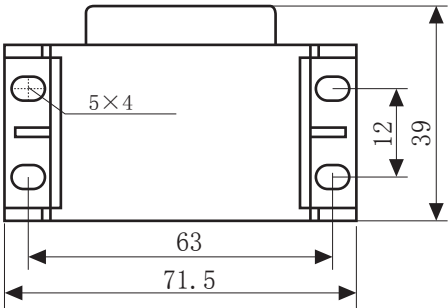

Bottom view

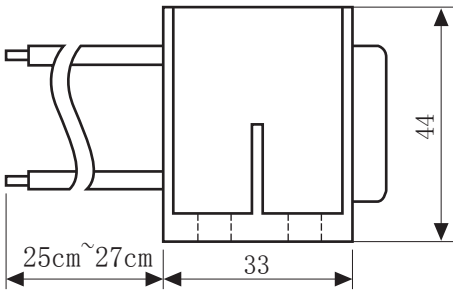

Side view

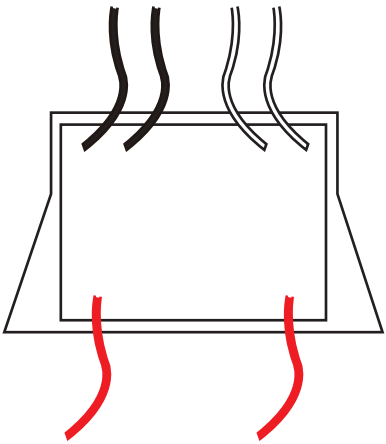

Front view