

SCT024TSL-D




Characteristic:

Safety lock clasp, easy installation.
Built-in rectifier,cable output.

Technical index:

Mounting type: Free hanging (In-Line)
Material of core:Laminated silicon steel
Applicable standards: GB20840-2014
Operating temperature: -25℃ ~+60℃
Storage temperature: -30℃ ~+90℃
Frequency range: 50Hz-60Hz
Waterproof grade: IP00
Dielectric strength: Input (bare conductor)/Output AC 800V/1min 50Hz
Output/housing AC 3.5KV/1min 50Hz


Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Input current	100	150	200	250	300	A	Specifications of cable: 2 x 0.2mm² two core sheathed cable The length of cable:100cm~105cm 
Output voltage	1/3/5					V / DC	
Accuracy	1					%	
Weight	226					g	

Product picture :(the printed words are for reference only, subject to the actual product)



Dimensions (in mm±0.5) :

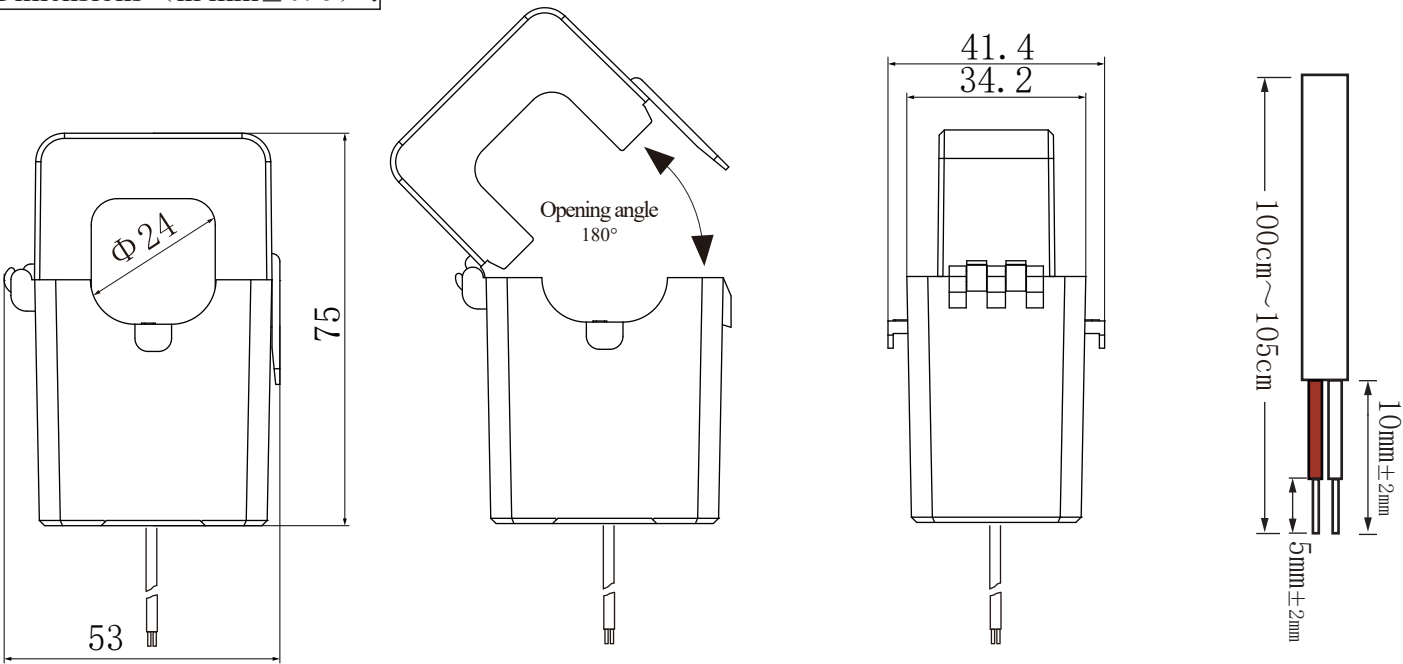

Front view

Side view