

Characteristic:

Safety lock buckle, easy installation, cable output.

Technical index:

Mounting type: Free hanging (In-Line)

Material of core: Ferrite

Applicable standards: GB20840-2014

Operating temperature: -25℃ ~ +60℃

Storage temperature: -30℃ ~ +90℃

Frequency range: 50Hz-1KHz

Waterproof grade: IP00


Dielectric strength: Input (bare conductor)/Output AC 800V/1min 50Hz

Output/housing AC 3.5KV/1min 50Hz


Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Product picture :(the printed words are for reference only, subject to the actual product)





Rated input	10	30	50	80	100	120	A	Specifications of cable: 2 x 0.2mm² two core sheathed cable The length of cable:100cm~105cm  Voltage output type Secondary is not allowed to short circuit
Rated output	0.333/1/3/5						V/AC	
Accuracy	1						%	
Phase shift	≤184'						'	
Weight	70						g	

Dimensions (in mm±0.5):

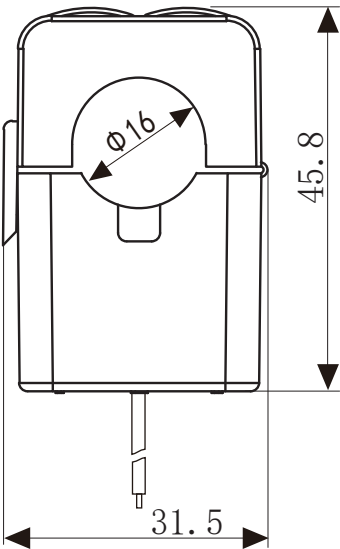

Front view

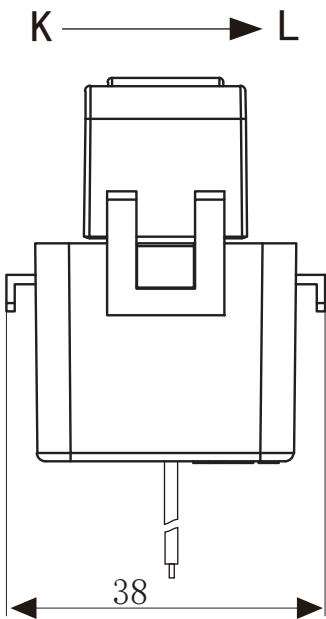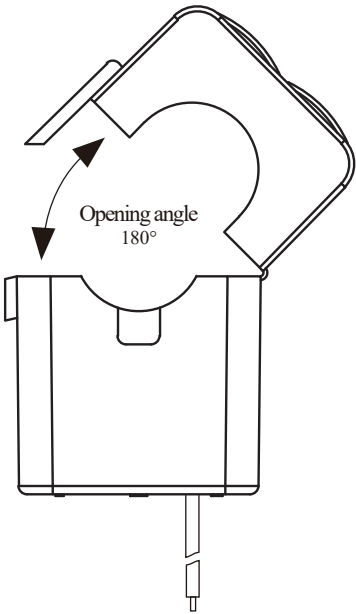

Side view

