

Characteristic:

Safety lock buckle, easy installation, cable output.


Product picture :(the printed words are for reference only, subject to the actual product)

Technical index:


Mounting type: Free hanging (In-Line)
Material of core: Laminated silicon steel
Applicable standards: GB20840-2014
Operating temperature: -25℃ ~+60℃
Storage temperature: -30℃ ~+90℃
Frequency range: 50Hz-60Hz
Waterproof grade: IP00
Dielectric strength: Input (bare conductor)/Output AC 800V/1min 50Hz
Output/housing AC 3.5KV/1min 50Hz




Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Rated input	100		200		300		400		500		600		A	Specifications of cable: 2 x 0.2mm² two core sheathed cable The length of cable:100cm~105cm  TVS: Transient Voltage Suppressor (7.5V) Current output type Secondary is not allowed to open circuit
Rated output	50	100	50	100	50	100	50	100	50	100	50	100	mA	
Turns ratio	1:2000	1:1000	1:4000	1:2000	1:6000	1:3000	1:8000	1:4000	1:10000	1:5000	1:12000	1:6000	—	
Accuracy	0.5/0.2	0.5	0.5/0.2	0.5/0.2	0.5/0.2	0.5/0.2	0.5/0.2	0.5/0.2	0.5/0.2	0.5/0.2	0.5/0.2	0.5/0.2	%	
Sampling resistance	20	10	20	10	20	10	20	10	20	10	20	10	Ω	
Weight	330												g	

Dimensions (in mm±0.5) :

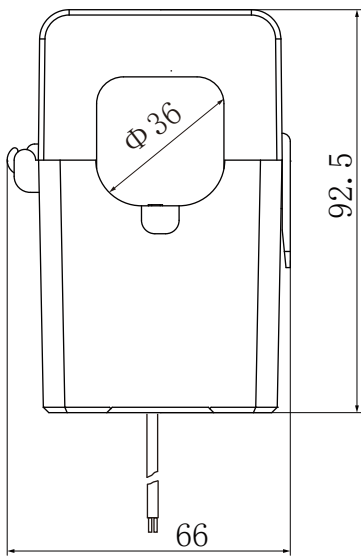

Front view

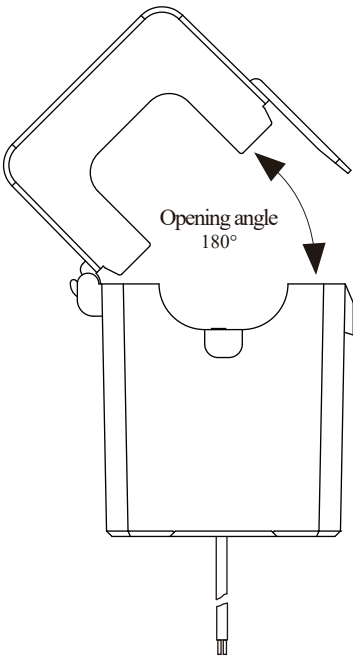

Side view

