

Characteristic:

Safety lock buckle, easy installation.

Built-in rectifier,cable output.

Technical index:

Mounting type: Free hanging (In-Line)

Material of core: Ferrite

Applicable standards: GB20840-2014

Operating temperature: -25℃ ~ +70℃

Storage temperature: -30℃ ~ +90℃


Frequency range: 50Hz-1KHz

Waterproof grade: IP00

Dielectric strength: Input (bare conductor)/Output AC 800V/1min 50Hz

Output/housing AC 3.5KV/1min 50Hz


Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Rated input	30	50	60	80	100	A	Specifications of cable: 2 x 0.2mm² two core sheathed cable The length of cable:100cm±3cm  Voltage output type Secondary are not allowed to short circuit
Rated output	1 / 3 / 5					V / DC	
Accuracy	1					%	
Weight	70					g	



Product picture :(the printed words are for reference only, subject to the actual product)



Dimensions (in mm±0.5) :

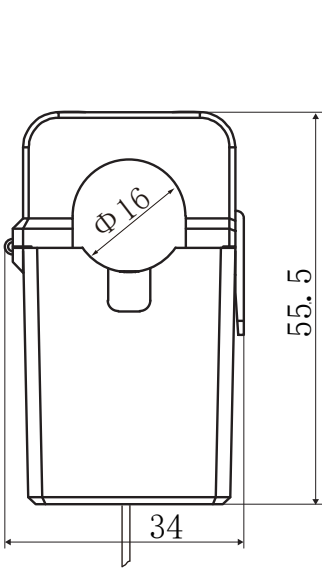

Front view

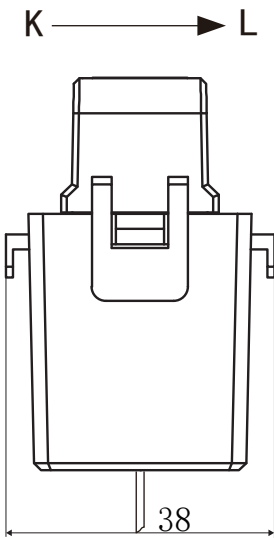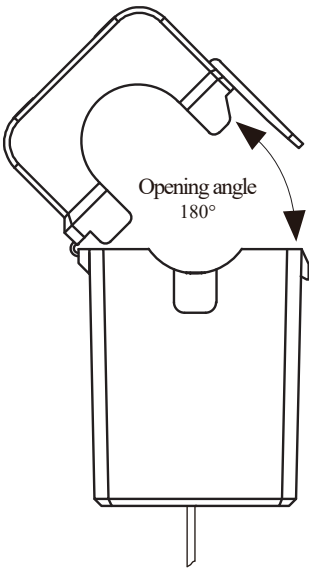

Side view

