

Characteristics:

1. Vacuum epoxy resin encapsulated, 100°C /6 hours high temperature aging, long working life 20 years and with high dielectric strength
2. High quality H18 silicon steel sheet, low temperature rise, high efficiency
3. PBT engineering plastic, environmental protection, flame retardant, 120 degrees no deformation
4. Reasonable structure, convenient installation, low noise, strong seismic, sealed waterproof, moisture-proof

Technical index:

Mounting type: Sub-plate mount

Flame resistance : UL94-V0

Insulation class: B

Waterproof grade: IP67

Operation temperature: -30°C ~+40°C


Work frequency: 50Hz~60Hz

Dielectric strength: Pri./Sec. 3.75KV 50Hz 1min 5mA, Sec./Sec 500V 50Hz 1min 5mA


Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Primary voltage	110/220/230/380	V
Primary voltage range	10	%
Power	20	VA
Voltage regulation	≤15	%
Temperature rising	≤20	°C
No-load loss	≤1.7	W
Weight	497	g

Dimensions (in mm±0.5)

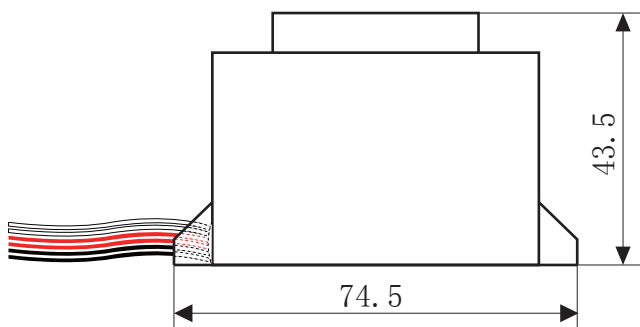

Front view

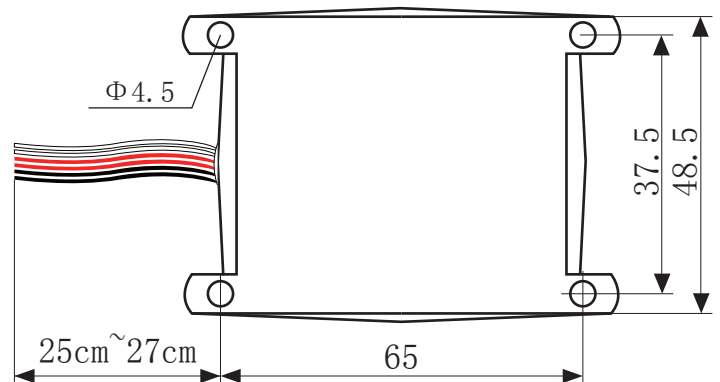

Bottom view

Product picture print for reference only, subject to the actual product



Standard output parameter table:

(Factory test is based on the full-load voltage)

Secondary voltage		Secondary no-load voltage		Secondary full-load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	6.7V	6.7V×2	3333mA	1667mA×2
7.5V	7.5V×2	8.4V	8.4V×2	2666mA	1333mA×2
9V	9V×2	10.1V	10.1V×2	2222mA	1111mA×2
12V	12V×2	13.5V	13.5V×2	1666mA	833mA×2
15V	15V×2	17V	17V×2	1333mA	667mA×2
18V	18V×2	20.3V	20.3V×2	1111mA	555.5mA×2
24V	24V×2	27.1V	27.1V×2	833mA	416.5mA×2

Schematic diagram:

