

PU series flat type isolation transformer



Model:PU3917B

Characteristics:

PCB mounting, low mounting height, Input: double
110V/double 115V(or producing as customerized).



Technical Index:


Mounting type: PCB
Flame resistance : UL94-V0
Isulation class: B
Operation temperature: -30°C ~ +40°C
Work frequency: 50Hz ~ 60Hz
Dielectric strength: 4KV 50Hz 1min

Secondary voltage	Secondary no load voltage	Secondary full load current
6V×2	7.2V×2	1.67A×2
7.5V×2	9V×2	1.33A×2
9V×2	10.8V×2	1.11A×2
12V×2	14.4V×2	0.833A×2
15V×2	18V×2	0.667A×2
18V×2	21.6V×2	0.556A×2
24V×2	28.8V×2	0.417A×2

Technical Parameters table:

Primary voltage	110×2/115×2	V
Primary voltage range	±10	%
Voltage regulation	≤18	%
Power	20	VA
Temperature rising	≤27	°C
No load loss	≤1.3	W
weight	420	g

Schematic Diagram:

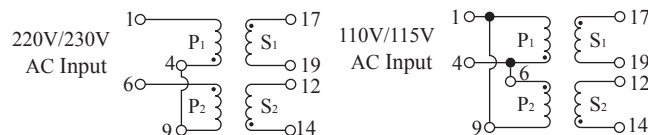

Dimension (in mm) :

