

Model:LPB4820

Characteristics:

Used with 4.8mm plug terminal,with FDD2-187 cold crimp terminal,easy connection,vacuum epoxy encapsulated, primary voltage:110V/220V/230V(or producing as customerized).

Technical index:

Mounting type: Plate mount


Flame resistance: UL94-V0

Insulation class : B

Operation temperature: -30℃~+40℃

Work frequency: 50Hz~60Hz

Dielectric strength: 3.75KV 50Hz 1min



Standard output parameter table:


(Factory test is based on the full-load voltage)

Secondary voltage		Secondary no-load voltage		Secondary full-load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	7.4V	7.4V×2	2000mA	1000mA×2
7.5V	7.5V×2	9.3V	9.3V×2	1600mA	800mA×2
9V	9V×2	11.1V	11.1V×2	1333mA	666.5mA×2
12V	12V×2	14.8V	14.8V×2	1000mA	500mA×2
15V	15V×2	18.5V	18.5V×2	800mA	400mA×2
18V	18V×2	22.2V	22.2V×2	666.6mA	333.3mA×2
24V	24V×2	29.6V	29.6V×2	500mA	250mA×2


Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Primary voltage	110/220/230	V
Primary voltage range	±10	%
Voltage regulation	≤19	%
Power	12	VA
Temperature rising	≤25	℃
No-load loss	≤0.9	W
Weight	300	g


Schematic diagram:

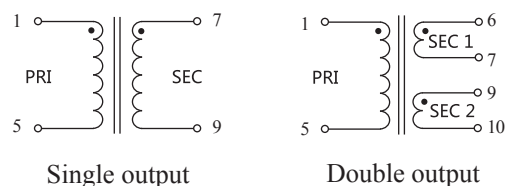


Dimension (in mm) :

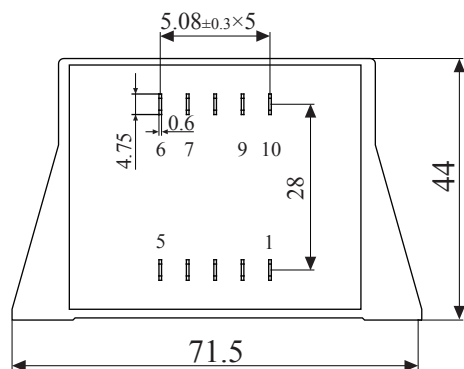

Front view

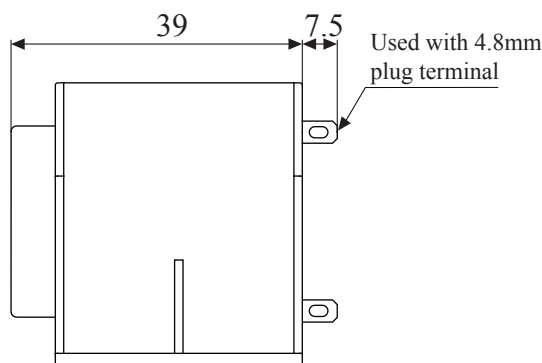

Side view

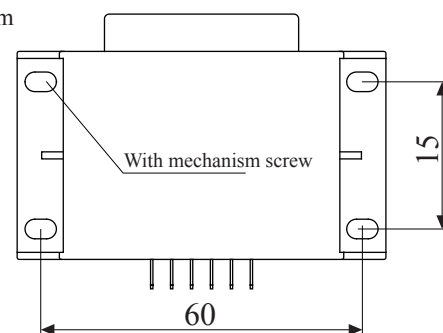

Top view