

Model:LPB5424

Characteristics:

Used with 4.8mm plug terminal,with FDD2-187 cold crimp terminal,easy connection,vacuum epoxy encapsulated, primary voltage:110V/220V/230V(or producing as customerized).

Technical index:

Mounting type: Plate mount


Flame resistance: UL94-V0

Insulation class : B

Operation temperature: -30℃~+40℃

Work frequency: 50Hz~60Hz

Dielectric strength: 3.75KV 50Hz 1min



Standard output parameter table:


(Factory test is based on the full-load voltage)

Secondary voltage		Secondary no-load voltage		Secondary full-load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	6.6V	6.6V×2	3.33A	1.67A×2
7.5V	7.5V×2	8.2V	8.2V×2	2.66A	1.33A×2
9V	9V×2	10.2V	10.2V×2	2.22A	1.11A×2
12V	12V×2	13.1V	13.1V×2	1.66A	0.83A×2
15V	15V×2	16.4V	16.4V×2	1.33A	0.665A×2
18V	18V×2	19.7V	19.7V×2	1.11A	0.555A×2
24V	24V×2	26.3V	26.3V×2	0.833A	0.417A×2


Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Primary voltage	110/220/230	V
Primary voltage range	±10	%
Voltage regulation	≤15	%
Power	20	VA
Temperature rising	≤28	℃
No-load loss	≤1.1	W
Weight	450	g


Schematic diagram:

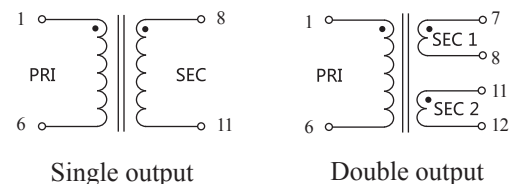


Dimension (in mm) :

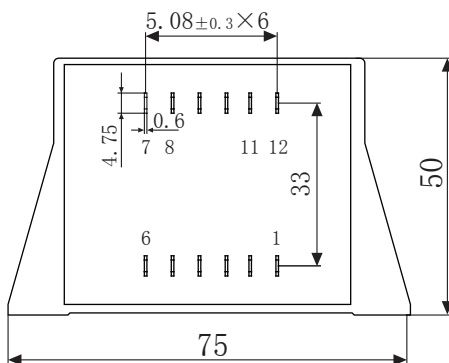

Front view

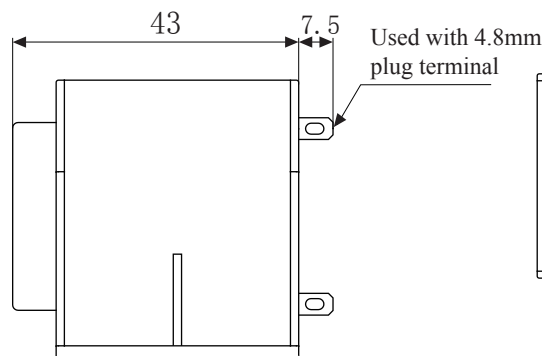

Side view

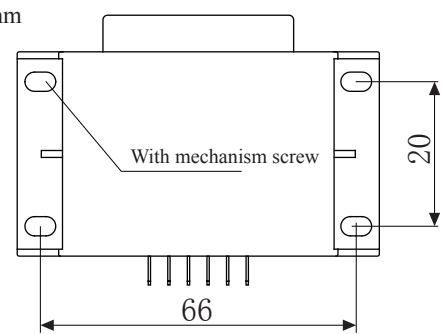

Top view