


Model:LPB6028

Characteristics:

Used with 4.8mm plug terminal,with FDD2-187 cold crimp terminal,easy connection,vacuum epoxy encapsulated,primary voltage:110V/220V/230V(or producing as customerized).

Technical index:

- Mounting type: Plate mount
- Flame resistance: UL94-V0
- Insulation class : B
- Operation temperature: -30℃~+40℃
- Work frequency: 50Hz~60Hz
- Dielectric strength: 3.75KV 50Hz 1min




Standard output parameter table:
(Factory test is based on the full-load votage)

Secondary voltage		Secondary no-load voltage		Secondary full-load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	7.4V	7.4V×2	6.6A	3.3A×2
7.5V	7.5V×2	9.3V	9.3V×2	5.33A	2.67A×2
9V	9V×2	11.1V	11.1V×2	4.44A	2.22A×2
12V	12V×2	14.8V	14.8V×2	3.33A	1.67A×2
15V	15V×2	18.5V	18.5V×2	2.66A	1.33A×2
18V	18V×2	22.2V	22.2V×2	2.22A	1.11A×2
24V	24V×2	29.6V	29.6V×2	1.66A	0.83A×2


Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Primary voltage	110/220/230	V
Primary voltage range	±10	%
Voltage regulation	≤15	%
Power	40	VA
Temperature rising	≤35	℃
No-load loss	≤1.5	W
Weight	700	g


Schematic diagram:

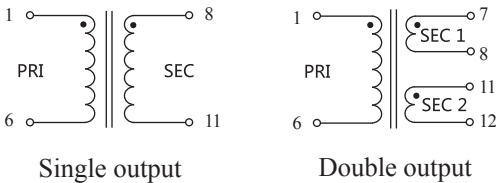


Dimension (in mm) :

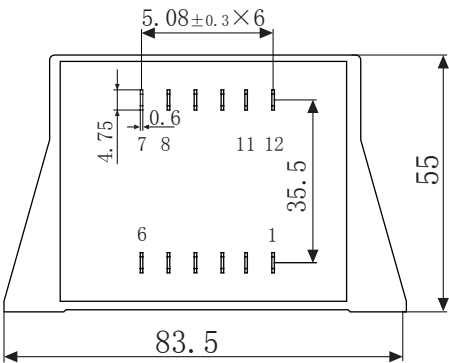

Front view

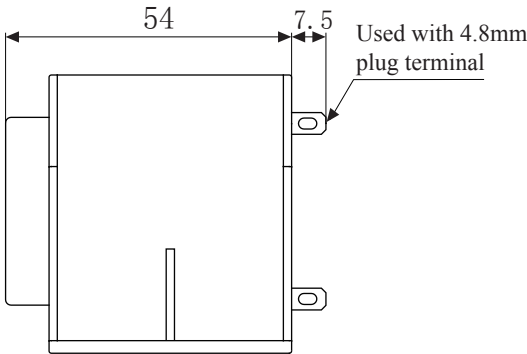

Side view

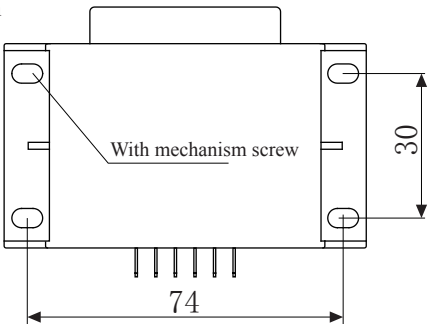

Top view