

Model:LPB6637

Characteristics:

Used with 4.8mm Plug terminal,with FDD2-187 cold crimp terminal,easy connection,vacuum epoxy encapsulated, primary voltage:110V/220V/230V(or producing as customerized).

Technical index:

Mounting type: Plate mount


Flame resistance: UL94-V0

Insulation class : B

Operation temperature: -30℃~+40℃

Work frequency: 50Hz~60Hz

Dielectric strength: 3.75KV 50Hz 1min



Standard output parameter table:


(Factory test is based on the full-load voltage)

Secondary voltage		Secondary no-load voltage		Secondary full-load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	6.8V	6.8V×2	10A	5A×2
7.5V	7.5V×2	8.5V	8.5V×2	8A	4A×2
9V	9V×2	10.2V	10.2V×2	6.66A	3.33A×2
12V	12V×2	13.7V	13.7V×2	5A	2.5A×2
15V	15V×2	17.1V	17.1V×2	4A	2A×2
18V	18V×2	20.5V	20.5V×2	3.33A	1.67A×2
24V	24V×2	27.3V	27.3V×2	2.5A	1.25A×2


Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Primary voltage	110/220/230	V
Primary voltage range	±10	%
Voltage regulation	≤15	%
Power	60	VA
Temperature rising	≤40	℃
No-load loss	≤1.5	W
Weight	1000	g


Schematic diagram:

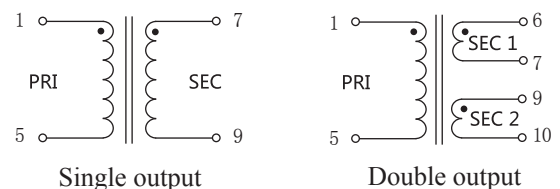


Dimension (in mm) :

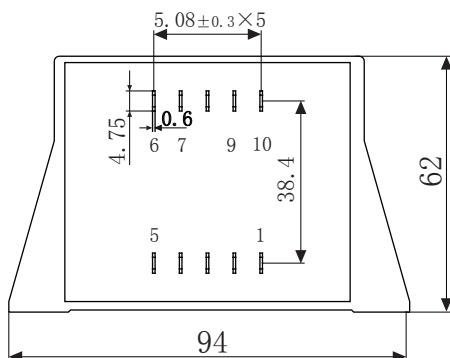

Front view

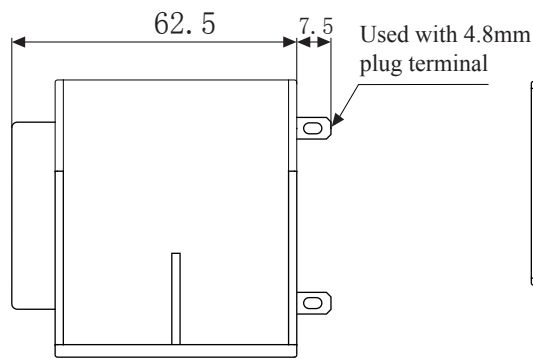

Side view

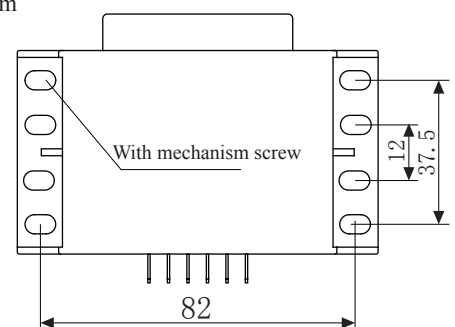

Top view