

3-SCT024SL-RJ12



Characteristics:

Three-phase integrated split core current transformer, easy installation, RJ12 connector output.



Product picture printing is for reference only, subject to the actual product

Technical index:

Mounting type: Free hanging (In-Line)
 Material of core: Laminated silicon steel
 Applicable standards: GB20840-2014
 Operating temperature: -25 °C ~ +60 °C
 Storage temperature: -30 °C ~ +90 °C
 Frequency range: 50Hz-60Hz
 Dielectric strength: Input (bare conductor)/Output AC 800V/1min 50Hz
 Output/Housing AC 3.5KV/1min 50Hz

Electrical parameters: The following parameters are typical values. The actual values shall be subject to the actual measurement of the product

Rated input	50		100		200		300		400		A		
Rated output	50	100	50	100	20	50	100	50	100	50	80	100	mA
Turns ratio	1:1000	1:500	1:2000	1:1000	1:10000	1:4000	1:1000	1:6000	1:3000	1:8000	1:5000	1:4000	-
Accuracy	1/0.5	1	0.5/0.2	1/0.5	0.5/0.2	0.5/0.2	1/0.5	0.5/0.2	0.5/0.2	0.5/0.2	0.5/0.2	0.5/0.2	%
Sampling resistance	20	10	20	10	50	20	10	20	10	20	20	8	Ω
Weight	678										g		

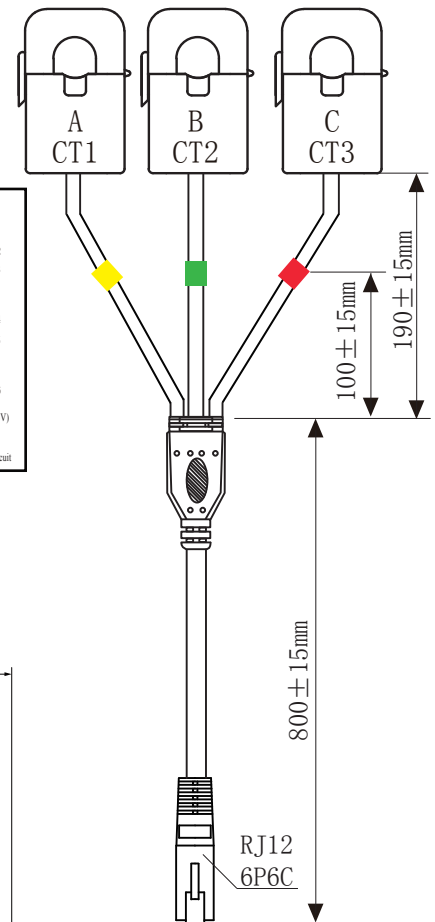

Dimensions (unit mm±0.5) :

