

3-SCT036SL-RJ12



Characteristics:

Three-phase integrated split core current transformer, easy installation, RJ12 connector output.

Technical index:

Mounting type: Free hanging (In-Line)

Material of core: Laminated silicon steel

Applicable standards: GB20840-2014

Operating temperature: -25 °C ~ +60 °C

Storage temperature: -30 °C ~ +90 °C



Frequency range: 50Hz-60Hz

Dielectric strength: Input (bare conductor)/Output AC 800V/1min 50Hz

Output/Housing AC 3.5KV/1min 50Hz

Electrical parameters: The following parameters are typical values. The actual values shall be subject to the actual measurement of the product

Rated input	100		200		300		400		500		600		A
Rated output	50	100	50	100	50	100	50	100	50	100	50	100	mA
Turns ratio	1:2000		1:1000		1:4000		1:2000		1:6000		1:3000		-
Accuracy	0.5/0.2		1/0.5		0.5/0.2		0.5/0.2		0.5/0.2		0.5/0.2		%
Sampling resistance	20	10	20	10	20	10	20	10	20	10	20	10	Ω
Weight	990												g

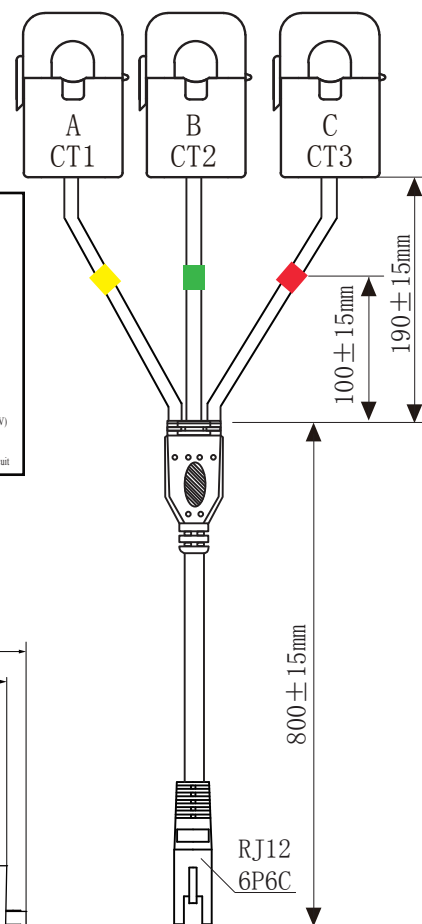

Dimensions (unit mm±0.5) :

