

Characteristics:

- 1. Vacuum epoxy resin encapsulated, 100℃ /6 hours high temperature aging, long woking life 20 years and with high delectric strength
- 2. High quality H18 laminated silicon steel, low temperature rise, high efficiency
- 3. PBT engineering plastic, environmental protection, flame retardant, 120 degrees no deformation
- 4. Reasonable structure, convenient installation, low noise, strong seismic, sealed waterproof, moisture-proof



Technical index:

- Mounting type: PCB
- Flame resistance : UL94-V0
- Insulation class: B
- Operation temperature: -30℃~+70℃
- Work frequency: 50Hz~60Hz
- Dielectric strength: Pri/Sec. 3.75KV 50Hz 1min 5mA, Sec/Sec 500V 50Hz 1min 5mA


Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Primary voltage	110/220/230/380	V
Primary voltage range	±10	%
Voltage regulation	≤27	%
Power	1.6	VA
Temperature rising	≤13	℃
No-load loss	≤0.29	W
Weight	82.5	g


Standard output parameter table:
(Factory test is based on the full-load vottage)

Secondary voltage		Secondary no-load voltage		Secondary full-load current	
Single	Double	Single	Double	Single	Double
6V	2×6V	8.2V	2×8.2V	267mA	2×133mA
7.5V	2×7.5V	10.3V	2×10.3V	213mA	2×107mA
9V	2×9V	12.3V	2×12.3V	178mA	2×89mA
12V	2×12V	16.4V	2×16.4V	133mA	2×67mA
15V	2×15V	20.5V	2×20.5V	107mA	2×53mA
18V	2×18V	24.7V	2×24.7V	89mA	2×44mA
24V	2×24V	32.9V	2×32.9V	67mA	2×33mA


Schematic diagram:

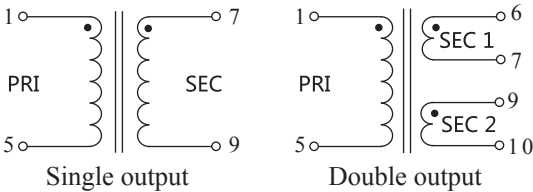


Dimension (in mm±0.5) :

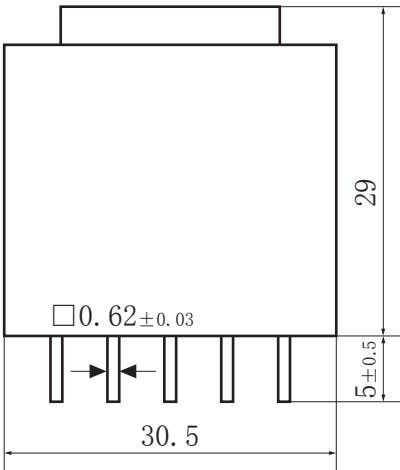

Front view

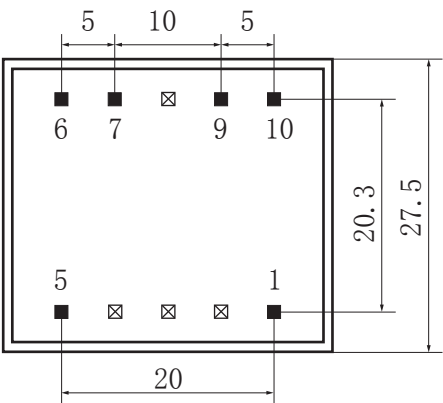


Bottom view

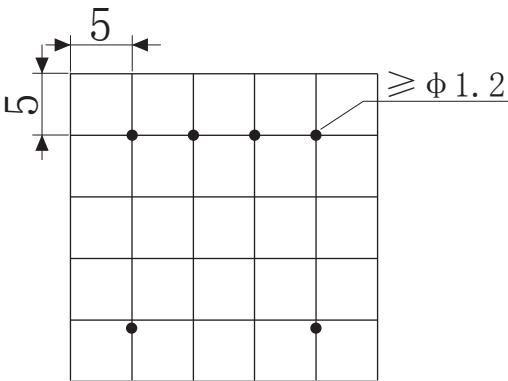


PCB location instance


Package

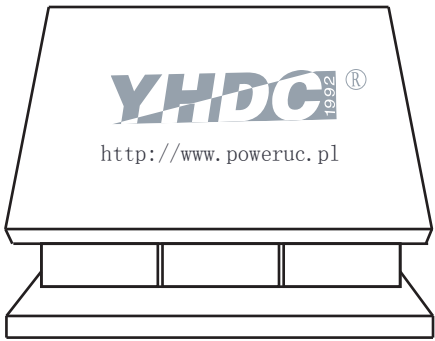


30 PCS/box

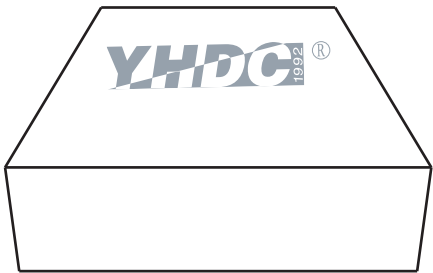

8 boxes/carton

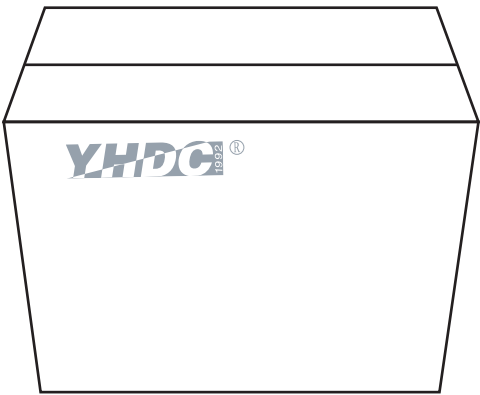

44 cartons/pallet

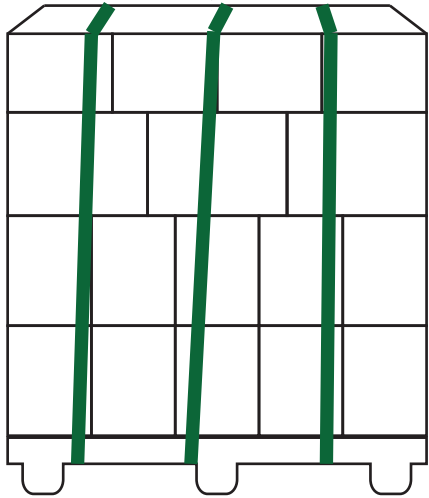

Package	Each one	About 82.5g	1 pcs
	Each box	About 2.9Kg	30 pcs
	Each carton	About 23.7Kg	240 pcs
	Each pallet	About 1054.8Kg	10560 pcs

Note: The above packaging (large volume) is for reference only, the actual packaging is subject to production and delivery.